


- High stability thanks to low center of gravity
- Comfortable cab
- Inside oil bath multi disc brake
- Low ground pressure
- > High traction





	payload	10.000 kg
	empty weight	14.850 kg
	loading capacity struck	5,8 m ⁻
	loading capacity heaped	6,6 m ⁻
	bucket system	hydraulical swivel tip
Dimensions		
	clearance height	3.020 mm
	tipping height	
	loading height (front)	2.175 mm
	total length	6.315 mm
	total width	
	ground clearance	
Transmission		
	hydrostatic drive with planetary transmission	1
Speed		
.,	speed I	0-8 km/h
	speed II	0–15 km/h
Steering		
	steering wheel or joystick	
Brake System		
orane system	inside oilbath multi disc brake	
Engine	made onbutt mutil disc state	
Liigine	6 cylinder Cummins diesel engine QSB 6.7 – v	water cooled _
	power 180 kW with 2.200 rpm	vater cooled –
Width of Tracks	· · · · · · · · · · · · · · · · · · ·	
	750 mm	
Ground Pressure		
	0,5 kg/cm ²	
Bonnet		
20	fast and easy accessibility to all service points	s thanks to engine opening bonnet in two pieces
Tank Capacity	ast and easy accessionity to an service points	y manus to engine opening sometiment of process
rank capacity	fuel	
	hydraulic oil	
Electrics	- Invariance on	
Electrics	24 V electric system with main switch error d	etection made fuel and hour counter control lamns for
	24 V electric system with main switch, error detection mode, fuel and hour counter, control lamps for engine oil; park brake, direction indicator, battery charging control, hydraulic filter, display for drive position	
Standard Equipment		
	comfortable cab with air-suspended driver's s	eat, road traffic lighting system, bucket from wear-resistant fine-
	comfortable cab with air-suspended driver's seat, road traffic lighting system, bucket from wear-resistant fine- grain steel, beacon light, cigarette lighter, sun roller blind for front windscreen, device for radio, loudspeaker	
	and antenna, CE certificate, manual and spare	

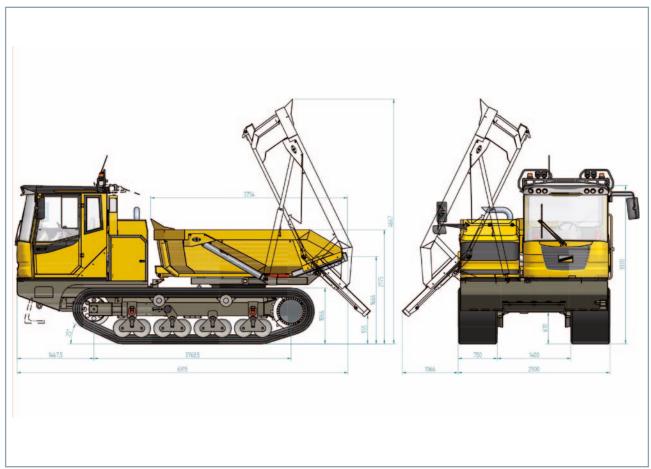