

MOVING YOU FURTHER

HX220 L / NL

With Tier 4 final / Stage IV Engine installed



*Photo may include optional equipment.

Net Power

SAE J1349 / 129 kW (173 HP) at 1,950 rpm

Gross Power

SAE J1995 / 136 kW (182.6 HP) at 1,950 rpm

Travel Speed

5.5 km/hr (3.41 mph) /
3.6 km/hr (2.23 mph)

Operating Weight

HX220 L: 22,100 kg / 48,720 lb
HX220 NL: 22,300 kg / 49,720 lb



RULE THE GROUND

The HX Series excavators are products of HHI's spirit of initiative, creativity and strong drive. HHI's engineers, who are the best in the industry, have worked tirelessly to offer a zero-defect product. The new HX Series reflects customers' needs in the field gleaned by thorough monitoring. They maximize fuel efficiency and performance proven by rigorous field tests and quality control.





*Photo may include optional equipment.

RULE THE GROUND

The HX series exceeds customers' expectation!
Become a true leader on the ground with HHI's HX series.



WORK MAX, WORTH MAX

- ECO Gauge
- IPC (Intelligent Power Control)
- New Variable Power Control
- Electronic Viscous Fan Clutch
- Attachment Flow Control (Option)
- New Cooling System with Increased Air Flow
- Enlarged Air Inlet with Grill Cover
- One Pedal Travel Straight (Option)
- Cycle Time Improvement
- Boom Floating Control (Option / HX220 L only)



MORE RELIABLE, MORE SUSTAINABLE

- Durable Cooling Module
- Reinforced Pin, Bush and Polymer Shim
- Reinforced Durability of Upper and Lower Structure and Attachments
- Wear Resistant Cover Plate
- Hi-grade (High-pressure) Hoses



INFOTAINMENT FRONTIER

- Intelligent and Wide Cluster
- Haptic Control
- Wi-Fi Direct with Smart Phone (Miracast)
- Proportional Auxiliary Hydraulic System
- New Audio System
- New Air Conditioning System



HX220 L / NL



MODERN COMFORT, SIMPLE AND SAFE SOLUTION

- AAVM (Advanced Around View Monitoring Camera System (Option))
- Easy Access to DEF/AdBlue® Supply System
- Hi MATE (Remote Management System)
- Cab Suspension Mount
- Swing Lock System (Option)
- Fine Swing Control (Option)



*Photo may include optional equipment.



*Photo may include optional equipment.

Cycle Time Improvement

The HX Series provides higher productivity on the site by faster operation: it loads trucks up to 5% faster and levels up to 4% faster than the 9 Series.

Boom Floating Control (Option / HX220 L only)

This option allows for improved stability and control when leveling. The boom is allowed to float with the arm-in and arm-out movement.

WORK MAX, WORTH MAX

Fuel Efficient System, Allows Great Performance

The HX Series has an eco-friendly, high-performance engine which ensures both excellent fuel efficiency and high power. With outstanding operating performance proven by rigorous tests at various work sites, it will satisfy any customer's needs.



ECO Gauge

ECO Gauge enable economic operation of machines. The gauge level and color displays engine torque and fuel efficiency level. On top of that, the status of fuel consumption such as average rate and the total amount of fuel consumed are displayed. Hourly and daily based fuel consumption can be checked in the detailed menu as well.



IPC (Intelligent Power Control)

The IPC controls power control depending on work environments. Its mode can be selected and released on the monitor. On the excavation mode, pump flow can be easily controlled by a lever, reducing fuel consumption.

New Variable Power Control

The HX Series minimizes equipment input and output control signals to improve fuel efficiency. Its three-stage Power mode ensures the highest performance in any operating environment.

* P (power) mode: Maximizes speed and power of the equipment for heavy load work.

* S (standard) mode: Optimizes performance and fuel efficiency of the equipment for general load work.

* E (economy) mode: Improves the control system for light load work.

Electronic Viscous Fan Clutch

The electronic fan clutch reduces noise during operation by precisely controlling RPM depending on the hydraulic oil and coolant temperature of the working vehicle, and minimizes fuel consumption. It is also possible to shorten the warm up time of hydraulic oil.



Attachment Flow Control (Option)

The HX Series improves pump flow rate by independent control of two pumps. It optimizes attachments for effective flow rate setting depending on attachments (ten breaker types and ten crusher types), enabling various operations matching the site environments.



New Cooling System with Increased Air Flow

With the three-floor stacked cooling module improving air inflow, the HX Series provides excellent cooling performance by increasing heat dissipation and can be easily cleaned.

Enlarged Air Inlet with Grill Cover

Enlarged vent hole of the air inlet side cover and fine net grill to prevent penetration of foreign materials further improve durability.

One Pedal Travel Straight (Option)

One Pedal Travel Straight (Option) is available for customers' convenience when long distance traveling or combination of attachment work with traveling is necessary.

MORE RELIABLE, MORE SUSTAINABLE

New Exterior Design for Robustness and Safety

The true value of the HX Series lies in its durability. The robust upper and lower frame structure that can endure external shock and high-load work and the attachments whose performance was proven by rigorous tests further show the real value of the HX Series in tough working environments and promise higher productivity.



Durable Cooling Module

The HX Series has a durable cooling module that passed stringent tests, demonstrating the highest productivity in tough working environments.



Reinforced Pin, Bush and Polymer Shim

The HX series improves lubricity of connecting parts between the equipment and attachments. Gaps with attachments are minimized by wear-resistant long-life pins, bushes and polymer shims, supporting the highest performance with invariable durability.



Wear Resistant Cover Plate

A wear-resistant cover plate is installed at the end of the arm to minimize abrasion on the connector between the arm and the bucket. Reduction of vibration of the buckets enables more stable operation even in high-load work.

Reinforced Durability of Upper and Lower Structure and Attachments

The upper and lower structure and attachments of the HX Series have higher durability than demanded on the site, as proven through numerous tests including road tests and virtual simulation. The wear resistance of the bucket has been improved by use of new material.



*Photo may include optional equipment.

Hi-grade (High-pressure) Hoses

The HX Series uses high-pressure hoses with improved heat and pressure resistance, greatly increasing the durability of the equipment.



New Air Conditioning System

With further improved air conditioning and heating, the HX Series increases the APTC capacity by 15% to provide a pleasant environment for operators all the time. The ventilation was designed such that warm and cool air even reach operators' faces (increasing their work satisfaction) or allowing pleasant working environment.

INFOTAINMENT FRONTIER

Enhanced Instrument Panel for Easier Monitoring

Many electronic functions are concentrated on the most convenient spot for operators to ensure work efficiency. The highly-advanced infotainment system, a product of HHI's intensive information technology, enables both productivity and pleasant work at the same time! The HX Series of HHI provides higher value and pleasure to customers.



Intelligent and Wide Cluster

The 8-inch capacitive-type display (like smartphone display) of the HX Series is 30% larger than the previous model, delivering excellent legibility. The centralized switches on the display allow convenience of checking the urea level and temperature outside the cabin. The audio AUX, air conditioner and heater interoperation, and inclination sensor also maximize operator's convenience.



New Audio System

Radio player, USB-based MP3 player, integrated Bluetooth hands-free feature, and built-in microphone allow convenient phone calls while in work and in transit. The radio player was moved to the right side from the rear, allowing easier access.

Haptic Control

The integrated jog shuttle-type haptic controller applies to the accelerator, remote air conditioner controller and operation of the cluster, allowing convenient operation. In the event of failure of the haptic switch, the emergency mode is activated on the cluster to ensure fail-safe function.

Wi-Fi Direct with Smart Phone (Miracast)

The Miracast system based on Wi-Fi of the operator's smart phone enables easy and convenient use of various features of the smart phone on the big screen including navigation, web surfing, viewing of videos, and listening to music. (For Android mobile phone now)


Proportional Auxiliary Hydraulic System

- Opt: Proportional control switch for better speed control
- Enlarge the operation convenience

MODERN COMFORT, SIMPLE AND SAFE SOLUTION

New Cabin for More Comfort

Low noise, low vibration, and ergonomic design make the cabin space more comfortable and pleasant! With focus on safety and convenience of operators, the HX Series allows rapid and safe equipment inspection anytime and anywhere, providing an optimal environment for operators to work.

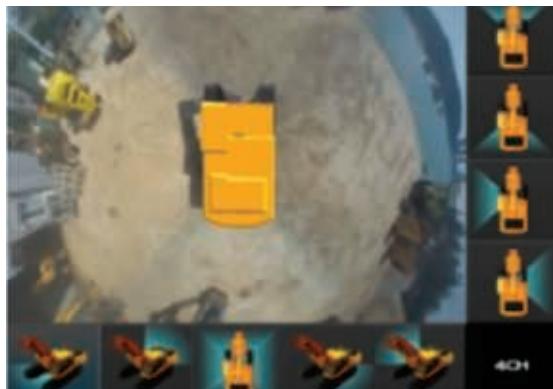

AAVM (Advanced Around View Monitoring) Camera System (Option)

The HX Series has a state-of-the-art AAVM video camera system to secure field of vision for operators in all directions, thereby preventing accidents. Operators can easily check the workplace in the front, rear and to the right and left.


* AAVM (Advanced Around View Monitoring): Secure field of vision in all directions by nine views including 3D bird's eye view and 2D/4CH view.

* IMOD (Intelligent Moving Object Detection): Inform when people or dangerous objects are detected within the range of operation (recognition distance: 5 m).



Easy Access to DEF/AdBlue® Supply System

The DEF/AdBlue® tank is installed inside the tool box and its inlet is remotely located for easy access and convenient supply. Warning of overfill is given by a red lamp signal. The DEF/AdBlue® supply module is attached on the side of the fuel tank for easy maintenance and filter replacement.

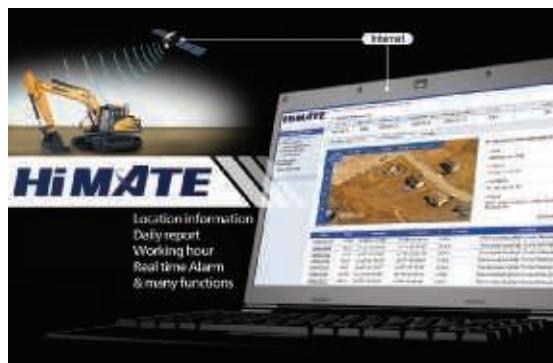

Hi MATE (Remote Management System)

Hi MATE, Hyundai's proprietary remote management system, provides operators and dealer service personnel access to vital service and diagnostic information on the machine from any computer with internet access. Users can pinpoint machine location using digital mapping and set machine work boundaries, reducing the need for multiple service calls. Hi MATE saves time and money for the owner and dealer by promoting preventative maintenance and reducing machine downtime.

* Operation of the system may be affected by the condition of telecommunication signal



*Photo may include optional equipment.

Swing Lock System (Option)

Swing Lock System is provided to maintain stability when swing movement needs to be limited, improving operating speed and productivity.

Fine Swing Control (Option)

Fine swing control is available for customer's convenience when users want to control fine swing.

SPECIFICATIONS

HX220 L

ENGINE		SWING SYSTEM		
Maker / Model		Fixed displacement axial piston motor		
Type	4-cycle turbocharged, charge air cooled diesel engine	Swing reduction	Planetary gear reduction	
Rated flywheel horse power	SAE J1995 (gross) DIN 6271/1 (gross)	136 kW (182.6 HP) at 1,950 rpm	Swing bearing lubrication	Grease-bathed
	J1349 (net) DIN 6271/1 (net)	129 kW (173 HP) at 1,950 rpm	Swing brake	Multi wet disc
		136 kW (185 PS) at 1,950 rpm	Swing speed	10.8 rpm
Max. torque	85.7 kgf·m (620 lbf·ft) at 1,500 rpm			
Bore x stroke	107 x 124 mm (4.21" x 4.88")			
Piston displacement	6,700 cc (409 cu in)			
Batteries	2 x 12 V x 100 Ah			
Starting motor	Denso 24 V - 4.8 kW			
Alternator	Denso 24 V - 95 A			
HYDRAULIC SYSTEM				
MAIN PUMP		SERVICE REFILL CAPACITIES		
Type	Variable displacement tandem axis piston pumps	Re-filling	liter	US gal
Max. flow	2 x 222 l/min	Fuel tank	400	106
Sub-pump for pilot circuit	Gear pump	Engine coolant	40	10.6
Cross-sensing and fuel saving pump system		Engine oil	23	6.1
HYDRAULIC MOTORS				
Travel	Two speed axial pistons motor with brake valve and parking brake	Swing device	6.2	1.64
Swing	Axial piston motor with automatic brake	Final drive (each)	4.5	1.2
RELIEF VALVE SETTING				
Implement circuits	350 kgf/cm ² (4,980 psi)	Hydraulic system (including tank)	275	72.6
Travel	350 kgf/cm ² (4,980 psi)	Hydraulic tank	160	42.3
Power boost (boom, arm, bucket)	380 kgf/cm ² (5,400 psi)	DEF/AdBlue®	27	5.9
Swing circuit	265 kgf/cm ² (3,770 psi)			
Pilot circuit	40 kgf/cm ² (570 psi)			
Service valve	Installed			
HYDRAULIC CYLINDERS				
No. of cylinder bore x stroke	Boom: Ø 120 x 1,290 mm 2-Piece Boom: Ø 160 x 1,060 mm Arm: Ø 140 x 1,510 mm Bucket: Ø 120 x 1,055 mm	UNDERCARRIAGE		
DRIVES & BRAKES				
Drive method	Fully hydrostatic type	Center frame	X - leg type	
Drive motor	Axial piston motor, in-shoe design	Track frame	Pentagonal box type	
Reduction system	Planetary reduction gear	No. of shoes on each side	49 EA	
Max. drawbar pull	20,200 kgf (44,530 lbf)	No. of carrier roller on each side	2 EA	
Max. travel speed (high / low)	5.5 km/hr (3.41 mph) / 3.6 km/hr (2.23 mph)	No. of track roller on each side	9 EA	
Gradeability	35° (70%)	No. of rail guard on each side	2 EA	
Parking brake	Multi wet disc			
CONTROL				
Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation.				
Pilot control	Two joysticks with one safety lever (LH): Swing and arm (RH): Boom and bucket (ISO)	OPERATING WEIGHT (APPROXIMATE)		
Traveling and steering	Two levers with pedals	Operating weight, including 5,680 mm (18' 8") boom; 2,920 mm (9' 7") arm; SAE heaped 0.92 m ³ (1.20 yd ³) bucket, lubricant, coolant, full fuel tank, full hydraulic tank and all standard equipments.		
Engine throttle	Electric, Dial type	OPERATING WEIGHT		
Shoes		Operating weight		Ground pressure
Type	Width mm (in)	kg (lb)		kgf / cm ² (psi)
Triple grouser	600 (24")	HX220 L	22,100 (48,720)	0.47 (6.68)
		HX220 L HW	23,560 (51,940)	0.50 (7.11)
	700 (28")	HX220 L	22,380 (49,340)	0.41 (5.83)
		HX220 L HW	23,840 (52,560)	0.44 (6.26)
	800 (32")	HX220 L	22,660 (49,960)	0.36 (5.12)
Double grouser		HX220 L HW	24,120 (53,170)	0.39 (5.55)
	900 (36")	HX220 L	22,940 (50,570)	0.33 (4.69)
		HX220 L HW	24,400 (53,790)	0.35 (4.98)
	600 (24")	HX220 L HW	23,690 (52,230)	0.50 (7.11)
	700 (28")	HX220 L HW	24,040 (53,000)	0.43 (6.11)

SPECIFICATIONS

HX220 NL

ENGINE		SWING SYSTEM									
Maker / Model		Cummins QSB6.7									
Type		4-cycle turbocharged, charge air cooled diesel engine									
Rated flywheel horse power	SAE J1995 (gross)	136 kW (182.6 HP) at 1,950 rpm									
	DIN 6271/1 (gross)	136 kW (185 PS) at 1,950 rpm									
Rated flywheel horse power	SAE J1349 (net)	129 kW (173 HP) at 1,950 rpm									
	DIN 6271/1 (net)	129 kW (175 PS) at 1,950 rpm									
Max. torque		85.7 kgf·m (620 lbf·ft) at 1,500 rpm									
Bore x stroke		107 x 124 mm (4.21" x 4.88")									
Piston displacement		6,700 cc (409 cu in)									
Batteries		2 x 12 V x 100 Ah									
Starting motor		Denso 24 V - 4.8 kW									
Alternator		Denso 24 V - 95 A									
HYDRAULIC SYSTEM											
MAIN PUMP											
Type	Variable displacement tandem axis piston pumps										
Max. flow	2 x 222 l/min										
Sub-pump for pilot circuit	Gear pump										
Cross-sensing and fuel saving pump system											
HYDRAULIC MOTORS											
Travel	Two speed axial pistons motor with brake valve and parking brake										
Swing	Axial piston motor with automatic brake										
RELIEF VALVE SETTING											
Implement circuits	350 kgf/cm ² (4,980 psi)										
Travel	350 kgf/cm ² (4,980 psi)										
Power boost (boom, arm, bucket)	380 kgf/cm ² (5,400 psi)										
Swing circuit	265 kgf/cm ² (3,770 psi)										
Pilot circuit	40 kgf/cm ² (570 psi)										
Service valve	Installed										
HYDRAULIC CYLINDERS											
No. of cylinder	Boom: Ø 120 x 1,290 mm										
bore x stroke	2-Piece Boom: Ø 160 x 1,060 mm										
	Arm: Ø 140 x 1,510 mm										
	Bucket: Ø 120 x 1,055 mm										
DRIVES & BRAKES											
Drive method	Fully hydrostatic type										
Drive motor	Axial piston motor, in-shoe design										
Reduction system	Planetary reduction gear										
Max. drawbar pull	20,200 kgf (44,530 lbf)										
Max. travel speed (high / low)	5.5 km/hr (3.41 mph) / 3.6 km/hr (2.23 mph)										
Gradeability	35° (70%)										
Parking brake	Multi wet disc										
CONTROL											
Pilot pressure operated joysticks and pedals with detachable lever provide almost effortless and fatigueless operation.											
Pilot control	Two joysticks with one safety lever (LH): Swing and arm (RH): Boom and bucket (ISO)										
Traveling and steering	Two levers with pedals										
Engine throttle	Electric, Dial type										
SWING SYSTEM											
Swing motor	Fixed displacement axial piston motor										
Swing reduction	Planetary gear reduction										
Swing bearing lubrication	Grease-bathed										
Swing brake	Multi wet disc										
Swing speed	10.8 rpm										
SERVICE REFILL CAPACITIES											
Re-filling	liter	US gal	UK gal								
Fuel tank	310	81.9	68.2								
Engine coolant	40	10.6	8.8								
Engine oil	23.7	6.3	5.2								
Swing device	6.2	1.64	1.36								
Final drive (each)	4.5	1.2	1								
Hydraulic system (including tank)	340	89.8	74.8								
Hydraulic tank	165	43.6	36.3								
DEF/AdBlue®	27	7.1	5.9								
UNDERCARRIAGE											
The X-leg type center frame is integrally welded with reinforced box-section track frames. The undercarriage includes lubricated rollers, idlers, track adjusters with shock absorbing springs and sprockets and a track chain with double or triple grouser shoes.											
Center frame	X - leg type										
Track frame	Pentagonal box type										
No. of shoes on each side	49 EA										
No. of carrier roller on each side	2 EA										
No. of track roller on each side	9 EA										
No. of rail guard on each side	2 EA										
OPERATING WEIGHT (APPROXIMATE)											
Operating weight, including 5,650 mm (18' 6") boom; 2,920 mm (9' 7") arm; SAE heaped 0.87 m ³ (1.14 yd ³) bucket, lubricant, coolant, full fuel tank, full hydraulic tank and all standard equipments.											
OPERATING WEIGHT											
Shoes	Operating weight			Ground pressure							
Type	Width mm (in)	kg (lb)	kgf / cm ² (psi)								
Triple grouser	500 (20")	HX220 NL	22,300 (49,160)	0.57 (8.11)							
	600 (24")	HX220 NL	22,400 (49,380)	0.48 (6.83)							
	700 (28")	HX220 NL	22,870 (50,420)	0.42 (5.97)							

BUCKET SELECTION GUIDE & DIGGING FORCE

HX220 L

BUCKETS



SAE heaped m³ (yd³)	0.80 (1.05) 0.92 (1.20) 1.10 (1.44) 1.34 (1.75)	1.34 (1.75) ◆ 0.90 (1.18) ◆ 1.05 (1.37)	◆ 0.87 (1.14)	◆ 1.20 (1.57)	★ 0.52 (0.68)
------------------------	--	---	---------------	---------------	---------------

Capacity m³ (yd³)		Width mm (in)		Weight kg (lb)	Recommendation mm (ft.in)								
SAE heaped	CECE heaped	Without side cutters	With side cutters		5,680 (18' 8") Boom				5,650 (18' 6") 2-Piece Boom			8,200 (26' 11") Boom	
					2,000 (6' 7") Arm	2,400 (7' 10") Arm	2,920 (9' 7") Arm	3,900 (12' 10") Arm	2,000 (6' 7") Arm	2,400 (7' 10") Arm	2,920 (9' 7") Arm		
0.80 (1.05)	0.70 (0.92)	1,070 (42.1)	1,160 (45.7)	770 (1,700)	●	●	●	○	●	●	○	-	
0.92 (1.20)	0.80 (1.05)	1,190 (46.9)	1,280 (50.4)	820 (1,810)	●	●	●	○	●	●	○	-	
1.10 (1.44)	0.96 (1.26)	1,375 (54.1)	1,465 (57.7)	890 (1,960)	●	●	○	○	●	○	○	-	
1.20 (1.57)	1.05 (1.37)	1,390 (54.7)	1,480 (58.3)	920 (2,030)	●	○	○	-	●	○	-	-	
1.34 (1.75)	1.17 (1.53)	1,525 (60.0)	1,615 (63.6)	990 (2,180)	○	○	○	-	○	○	-	-	
◆ 0.90 (1.18)	0.79 (1.03)	1,210 (47.6)	-	880 (1,940)	●	●	●	○	●	●	○	-	
◆ 1.05 (1.37)	0.92 (1.20)	1,355 (53.3)	-	940 (2,070)	●	●	○	○	●	○	○	-	
◆ 0.87 (1.14)	0.77 (1.01)	1,195 (47.0)	-	940 (2,070)	●	●	●	○	●	●	○	-	
◆ 1.20 (1.57)	1.05 (1.37)	1,520 (59.8)	-	1,120 (2,470)	○	○	-	-	○	○	-	-	
★ 0.52 (0.68)	0.45 (0.59)	945 (37.2)	1,020 (40.2)	460 (1,010)	-	-	-	-	-	-	-	○	

◆ Heavy duty bucket

◆ Rock-Heavy duty bucket

★ Long reach bucket

● : Applicable for materials with density of 2,000 kg /m³ (3,370 lb / yd³) or less

◎ : Applicable for materials with density of 1,600 kg /m³ (2,700 lb / yd³) or less

○ : Applicable for materials with density of 1,100 kg /m³ (1,850 lb / yd³) or less

ATTACHMENT

Booms and arms are welded with a low-stress, full-box section design.

5.68 m (18' 8") & 8.2 m (26' 11") Booms and 5.65 m (18' 6") 2-Piece Boom and 2.0 m (6' 7"); 2.4 m (7' 10"); 2.92 m (9' 7"); 3.9 m (12' 10") & 6.3 m (20' 8") Arms are available.

DIGGING FORCE

Boom	Length	mm (ft.in)	Boom 5,680 (18' 8")				2-Piece Boom 5,650 (18' 6")			8,200 (26' 11")	Remarks: []: Power Boost
	Weight	kg (lb)	1,950 (4,300)				2,600 (5,730)				
Arm	Length	mm (ft.in)	2,000 (6' 7")	2,400 (7' 10")	2,920 (9' 7")	3,900 (12' 10")	2,000 (6' 7")	2,400 (7' 10")	2,920 (9' 7")	6,300 (20' 8")	
	Weight	kg (lb)	975 (2,150)	1,045 (2,300)	1,095 (2,410)	1,295 (2,850)	975 (2,150)	1,045 (2,300)	1,095 (2,410)	1,330 (2,930)	
Bucket digging force	SAE	kN	133.4 [144.8]	133.4 [144.8]	133.4 [144.8]	133.4 [144.8]	133.4 [144.8]	133.4 [144.8]	133.4 [144.8]	72.6	
		kgf	13600 [14770]	13600 [14770]	13600 [14770]	13600 [14770]	13600 [14770]	13600 [14770]	13600 [14770]	7400	
		lbf	29980 [32550]	29980 [32550]	29980 [32550]	29980 [32550]	29980 [32550]	29980 [32550]	29980 [32550]	16310	
	ISO	kN	152.0 [165.0]	152.0 [165.0]	152.0 [165.0]	152.0 [165.0]	152.0 [165.0]	152.0 [165.0]	152.0 [165.0]	83.4	
		kgf	15500 [16830]	15500 [16830]	15500 [16830]	15500 [16830]	15500 [16830]	15500 [16830]	15500 [16830]	8500	
		lbf	34170 [37100]	34170 [37100]	34170 [37100]	34170 [37100]	34170 [37100]	34170 [37100]	34170 [37100]	18740	
Arm crowd force	SAE	kN	144.2 [156.5]	119.6 [129.9]	102.0 [110.7]	84.3 [91.6]	144.2 [156.5]	119.6 [129.9]	102.0 [110.7]	49.0	
		kgf	14700 [15960]	12200 [13250]	10400 [11290]	8600 [9340]	14700 [15960]	12200 [13250]	10400 [11290]	5000	
		lbf	32410 [35190]	26900 [29210]	22930 [24900]	18960 [20590]	32410 [35190]	26900 [29210]	22930 [24900]	11020	
	ISO	kN	151.0 [164.0]	125.5 [136.3]	106.9 [116.1]	87.3 [94.8]	151.0 [164.0]	125.5 [136.3]	106.9 [116.1]	50.0	
		kgf	15400 [16720]	12800 [13900]	10900 [11830]	8900 [9660]	15400 [16720]	12800 [13900]	10900 [11830]	5100	
		lbf	33950 [36860]	28220 [30640]	24030 [26090]	19620 [21300]	33950 [36860]	28220 [30640]	24030 [26090]	11240	

Note : Boom weight includes arm cylinder, piping, and pin

Arm weight includes bucket cylinder, linkage, and pin

BUCKET SELECTION GUIDE & DIGGING FORCE

HX220 NL

BUCKETS



SAE heaped
m³ (yd³)
0.80 (1.05)
0.92 (1.20)
1.10 (1.44)
1.20 (1.57)

0.80 (1.05)

1.34 (1.75)

◆ 0.90 (1.18)
◆ 1.05 (1.37)

◆ 0.87 (1.14)

◆ 1.20 (1.57)

★ 0.52 (0.68)

Capacity m ³ (yd ³)		Width mm (in)		Weight kg (lb)	Recommendation mm (ft.in)					
					5,650 (18' 6") Boom			5,650 (18' 6") 2-Piece Boom		
SAE heaped	CECE heaped	Without side cutters	With side cutters		2,000 (6' 7") Arm	2,400 (7' 10") Arm	2,920 (9' 7") Arm	2,000 (6' 7") Arm	2,400 (7' 10") Arm	2,920 (9' 7") Arm
0.80 (1.05)	0.70 (0.92)	1,070 (42.1)	1,160 (45.7)	770 (1,700)	●	●	●	●	●	◎
0.92 (1.20)	0.80 (1.05)	1,190 (46.9)	1,280 (50.4)	820 (1,810)	●	●	●	●	●	◎
1.10 (1.44)	0.96 (1.26)	1,375 (54.1)	1,465 (57.7)	890 (1,960)	●	●	○	●	○	○
1.20 (1.57)	1.05 (1.37)	1,390 (54.7)	1,480 (58.3)	920 (2,030)	●	○	○	●	○	-
1.34 (1.75)	1.17 (1.53)	1,525 (60.0)	1,615 (63.6)	990 (2,180)	○	○	○	○	○	-
◆ 0.90 (1.18)	0.79 (1.03)	1,210 (47.6)	-	880 (1,940)	●	●	●	●	●	◎
◆ 1.05 (1.37)	0.92 (1.20)	1,355 (53.3)	-	940 (2,070)	●	●	○	●	○	○
◆ 0.87 (1.14)	0.77 (1.01)	1,195 (47.0)	-	940 (2,070)	●	●	●	●	●	◎
◆ 1.20 (1.57)	1.05 (1.37)	1,520 (59.8)	-	1,120 (2,470)	○	○	-	○	○	-
★ 0.52 (0.68)	0.45 (0.59)	945 (37.2)	1,020 (40.2)	460 (1,010)	-	-	-	-	-	-

◆ Heavy duty bucket

◆ Rock-Heavy duty bucket

★ Long reach bucket

● : Applicable for materials with density of 2,000 kg /m³ (3,370 lb/ yd³) or less
◎ : Applicable for materials with density of 1,600 kg /m³ (2,700 lb/ yd³) or less

○ : Applicable for materials with density of 1,100 kg /m³ (1,850 lb/ yd³) or less

ATTACHMENT

Booms and arms are welded with a low-stress, full-box section design.

5.65 m (18' 6") Boom & 5.65 m (18' 6") 2-Piece Boom and 2.0 m (6' 7"); 2.4 m (7' 10") & 2.92 m (9' 7") Arms are available.

DIGGING FORCE											
Boom	Length	mm (ft.in)	Boom 5,650 (18' 6")				2-Piece Boom 5,650 (18' 6")				Remarks:
	Weight	kg (lb)	1,950 (4,300)				2,600 (5,730)				
Arm	Length	mm (ft.in)	2,000 (6' 7")	2,400 (7' 10")	2,920 (9' 7")	3,900 (12' 10")	2,000 (6' 7")	2,400 (7' 10")	2,920 (9' 7")		
	Weight	kg (lb)	975 (2,150)	1,045 (2,300)	1,095 (2,410)	1,295 (2,850)	975 (2,150)	1,045 (2,300)	1,095 (2,410)		
Bucket digging force	SAE	kN	133.4 [144.8]	133.4 [144.8]	133.4 [144.8]	133.4 [144.8]	133.4 [144.8]	133.4 [144.8]	133.4 [144.8]	133.4 [144.8]	
		kgf	13600 [14770]	13600 [14770]	13600 [14770]	13600 [14770]	13600 [14770]	13600 [14770]	13600 [14770]	13600 [14770]	
		lbf	29980 [32550]	29980 [32550]	29980 [32550]	29980 [32550]	29980 [32550]	29980 [32550]	29980 [32550]	29980 [32550]	
	ISO	kN	152.0 [165.0]	152.0 [165.0]	152.0 [165.0]	152.0 [165.0]	152.0 [165.0]	152.0 [165.0]	152.0 [165.0]	152.0 [165.0]	
		kgf	15500 [16830]	15500 [16830]	15500 [16830]	15500 [16830]	15500 [16830]	15500 [16830]	15500 [16830]	15500 [16830]	
		lbf	34170 [37100]	34170 [37100]	34170 [37100]	34170 [37100]	34170 [37100]	34170 [37100]	34170 [37100]	34170 [37100]	
Arm crowd force	SAE	kN	144.2 [156.5]	119.6 [129.9]	102.0 [110.7]	84.3 [91.6]	144.2 [156.5]	119.6 [129.9]	102.0 [110.7]		[]: Power Boost
		kgf	14700 [15960]	12200 [13250]	10400 [11290]	8600 [9340]	14700 [15960]	12200 [13250]	10400 [11290]		
		lbf	32410 [35190]	26900 [29210]	22930 [24900]	18960 [20590]	32410 [35190]	26900 [29210]	22930 [24900]		
	ISO	kN	151.0 [164.0]	125.5 [136.3]	106.9 [116.1]	87.3 [94.8]	151.0 [164.0]	125.5 [136.3]	106.9 [116.1]		
		kgf	15400 [16720]	12800 [13900]	10900 [11830]	8900 [9660]	15400 [16720]	12800 [13900]	10900 [11830]		
		lbf	33950 [36860]	28220 [30640]	24030 [26090]	19620 [21300]	33950 [36860]	28220 [30640]	24030 [26090]		


Note : Boom weight includes arm cylinder, piping, and pin

Arm weight includes bucket cylinder, linkage, and pin

DIMENSIONS & WORKING RANGE

HX220 L DIMENSIONS

5.68 m (18' 8") BOOM and 2.0 m (6' 7"); 2.4 m (7' 10"); 2.92 m (9' 7") & 3.9 m (12' 10") ARM

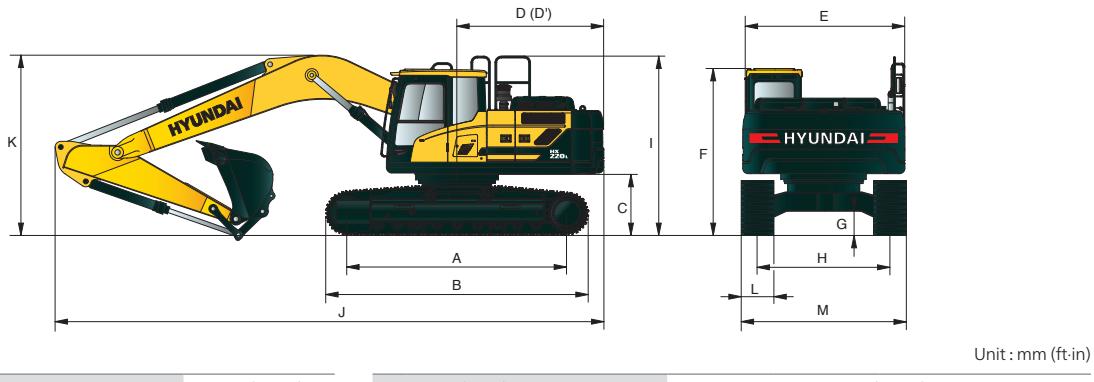


Unit : mm (ft-in)

A	Tumbler distance	3,650 (12' 0")
B	Overall length of crawler	4,404 (14' 4")
C	Ground clearance of counterweight	1,060 (3' 6")
D	Tail swing radius	2,890 (9' 5")
D'	Rear-end length	2,770 (9' 1")
E	Overall width of upperstructure	2,740 (9' 0")
F	Overall height of cab	3,000 (9' 8")
G	Min. ground clearance	480 (1' 7")
H	Track gauge	2,390 (7' 10")
I	Overall height of guardrail	3,210 (10' 5")

Boom length	5,680 (18' 8")			
	2,000 (6' 7")	2,400 (7' 10")	2,920 (9' 7")	3,900 (12' 10")
J	9,650 (31' 8")	9,570 (31' 5")	9,530 (31' 3")	9,520 (31' 3")
K	3,200 (10' 6")	3,110 (10' 2")	3,030 (9' 11")	3,480 (11' 5")
L	600 (24")	700 (28")	800 (32")	900 (36")
M	2,990 (9' 10")	3,090 (10' 2")	3,190 (10' 6")	3,290 (10' 10")

HX220 L WORKING RANGE

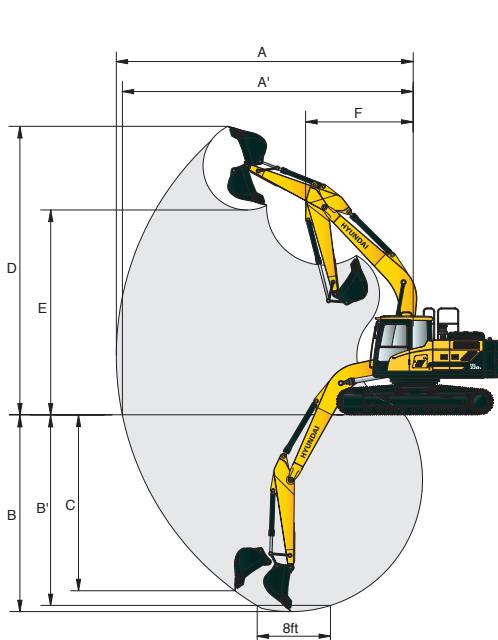


Unit : mm (ft-in)

Boom length	5,680 (18' 8")			
	2,000 (6' 7")	2,400 (7' 10")	2,920 (9' 7")	3,900 (12' 10")
A	9,140 (30' 0")	9,500 (31' 2")	9,980 (32' 9")	10,910 (35' 10")
A'	8,960 (29' 5")	9,330 (30' 7")	9,820 (32' 3")	10,770 (35' 4")
B	5,820 (19' 1")	6,220 (20' 5")	6,730 (22' 1")	7,720 (25' 4")
B'	5,580 (18' 4")	6,010 (19' 9")	6,560 (21' 6")	7,580 (24' 10")
C	5,280 (17' 4")	5,720 (18' 9")	6,280 (20' 7")	7,240 (23' 9")
D	9,140 (30' 0")	9,340 (30' 8")	9,600 (31' 6")	10,110 (33' 2")
E	6,330 (20' 9")	6,520 (21' 5")	6,780 (22' 3")	7,290 (23' 11")
F	3,750 (12' 4")	3,740 (12' 3")	3,670 (12' 0")	3,700 (12' 2")

DIMENSIONS & WORKING RANGE

HX220 L 2-PIECE BOOM DIMENSIONS

5.65 m (18' 6") 2-Piece BOOM and 2.0 m (6' 7"); 2.4 m (7' 10") & 2.92 m (9' 7") ARM

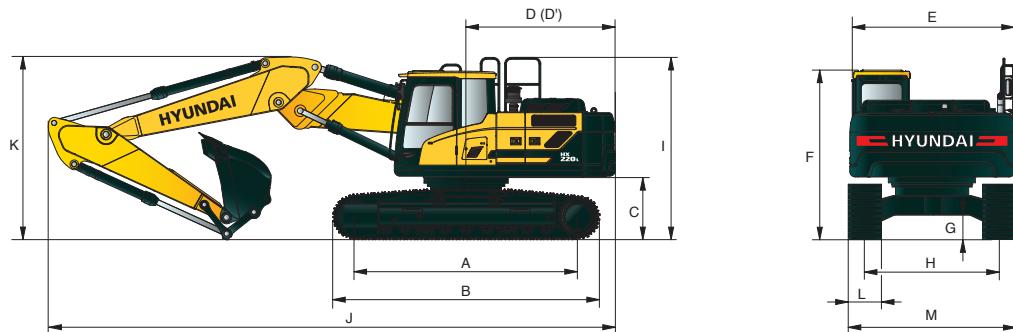


Unit : mm (ft·in)

A	Tumbler distance	3,650 (12' 0")
B	Overall length of crawler	4,404 (14' 4")
C	Ground clearance of counterweight	1,060 (3' 6")
D	Tail swing radius	2,890 (9' 5")
D'	Rear-end length	2,770 (9' 1")
E	Overall width of upperstructure	2,740 (9' 0")
F	Overall height of cab	3,000 (9' 8")
G	Min. ground clearance	480 (1' 7")
H	Track gauge	2,390 (7' 10")
I	Overall height of guardrail	3,210 (10' 5")

Boom length	5,650 (18' 6") 2-Piece Boom		
Arm length	2,000 (6' 7")	2,400 (7' 10")	2,920 (9' 7")
J	Overall length	9,650 (31' 8")	9,570 (31' 5")
K	Overall height of boom	3,200 (10' 6")	3,110 (10' 2")
L	Track shoe width	600 (24")	700 (28")
M	Overall width	2,990 (9' 10")	3,090 (10' 2")
		3,190 (10' 6")	3,290 (10' 10")

HX220 L 2-PIECE BOOM WORKING RANGE

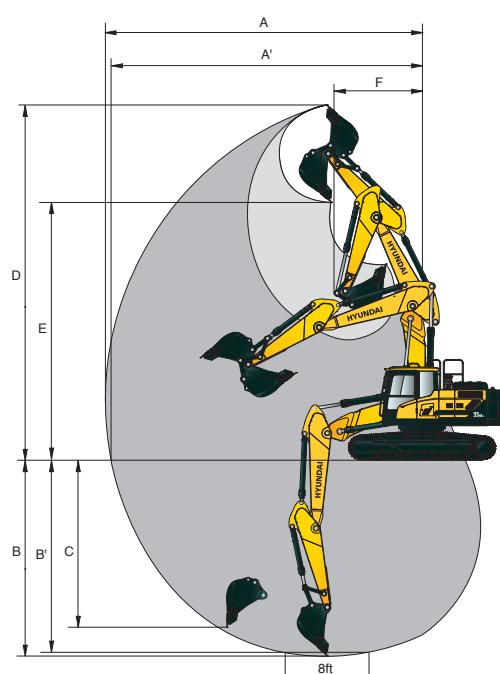


Unit : mm (ft·in)

Boom length	5,650 (18' 6") 2-Piece Boom		
Arm length	2,000 (6' 7")	2,400 (7' 10")	2,920 (9' 7")
A	Max. digging reach	9,120 (29' 11")	9,530 (31' 3")
A'	Max. digging reach on ground	8,950 (29' 4")	9,360 (30' 8")
B	Max. digging depth	5,820 (19' 1")	5,880 (19' 3")
B'	Max. digging depth (8' level)	5,480 (18' 0")	5,770 (18' 11")
C	Max. vertical wall digging depth	5,360 (17' 7")	5,020 (16' 6")
D	Max. digging height	10,310 (33' 10")	10,670 (35' 0")
E	Max. dumping height	7,390 (24' 3")	7,750 (25' 5")
F	Min. front swing radius	2,870 (9' 5")	2,660 (8' 9")
		2,530 (8' 4")	

DIMENSIONS & WORKING RANGE

HX220 L LONG REACH DIMENSIONS


8.2 m (26' 11") BOOM and 6.3 m (20' 8") ARM

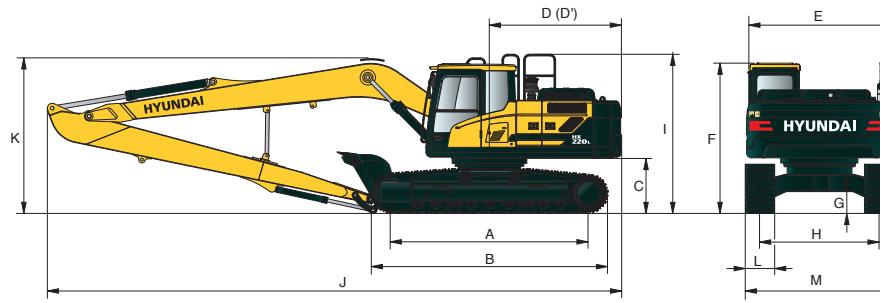

Unit : mm (ft-in)

A	Tumbler distance	3,650 (12' 0")
B	Overall length of crawler	4,404 (14' 4")
C	Ground clearance of counterweight	1,060 (3' 6")
D	Tail swing radius	2,890 (9' 5")
D'	Rear-end length	2,770 (9' 1")
E	Overall width of upperstructure	2,740 (9' 0")
F	Overall height of cab	3,000 (9' 8")
G	Min. ground clearance	480 (1' 7")
H	Track gauge	2,390 (7' 10")
I	Overall height of guardrail	3,210 (10' 5")
	Boom length	8,200 (26' 11")
	Arm length	6,300 (20' 8")
J	Overall length	12,030 (39' 6")
K	Overall height of boom	3,280 (10' 9")
L	Track shoe width	800 (32")
M	Overall width	3,190 (10' 6")

HX220 L LONG REACH WORKING RANGE

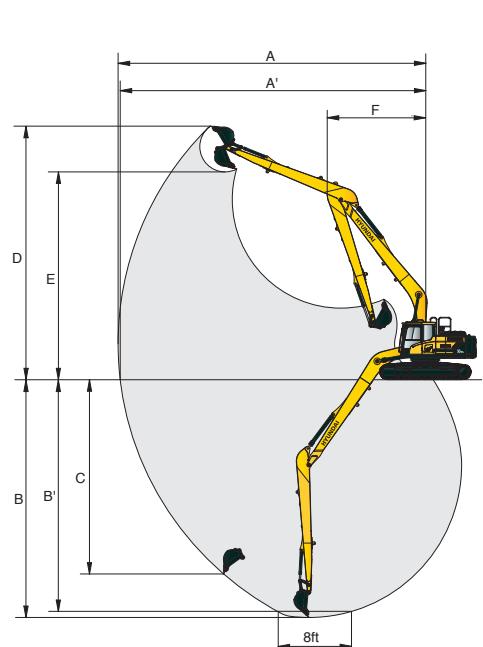


Unit : mm (ft-in)

Boom length	8,200 (26' 11")
Arm length	6,300 (20' 8")
A Max. digging reach	15,220 (50' 0")
A' Max. digging reach on ground	15,120 (49' 7")
B Max. digging depth	11,760 (38' 7")
B' Max. digging depth (8' level)	11,650 (38' 3")
C Max. vertical wall digging depth	9,610 (31' 6")
D Max. digging height	12,550 (41' 2")
E Max. dumping height	10,280 (33' 8")
F Min. front swing radius	4,870 (16' 0")

DIMENSIONS & WORKING RANGE

HX220 L HIGH WALKER DIMENSIONS


5.68 m (18' 8") BOOM and 2.0 m (6' 7"); 2.4 m (7' 10") & 2.92 m (9' 7") ARM

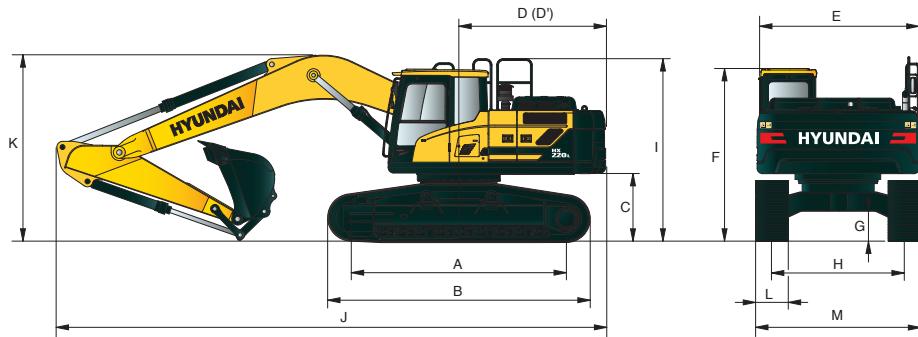

Unit : mm (ft-in)

A Tumbler distance		3,650 (12' 0")	Boom length				5,680 (18' 8")
B Overall length of crawler		4,404 (14' 4")	Arm length	2,000 (6' 7")	2,400 (7' 10")	2,920 (9' 7")	3,900 (12' 10")
C Ground clearance of counterweight		1,260 (4' 1")	J Overall length	9,650 (31' 8")	9,550 (31' 4")	9,470 (31' 1")	9,560 (31' 4")
D Tail swing radius		2,890 (9' 5")	K Overall height of boom	3,290 (10' 10")	3,170 (10' 5")	3,060 (10' 0")	3,450 (11' 4")
D' Rear-end length		2,770 (9' 1")	L Track shoe type	Triple grouser			Double grouser
E Overall width of upperstructure		2,740 (9' 0")	L Track shoe width	600 (24")	700 (28")	800 (32")	900 (36")
F Overall height of cab		3,200 (10' 5")	M Overall width	3,395 (11' 2")	3,495 (11' 6")	3,595 (11' 10")	3,695 (12' 2")
G Min. ground clearance		660 (2' 2")		3,395 (11' 2")	3,495 (11' 6")	3,595 (11' 10")	3,695 (12' 2")
H Track gauge		2,795 (9' 2")		3,395 (11' 2")	3,495 (11' 6")	3,595 (11' 10")	3,695 (12' 2")
I Overall height of guardrail		3,410 (11' 2")		3,395 (11' 2")	3,495 (11' 6")	3,595 (11' 10")	3,695 (12' 2")

HX220 L HIGH WALKER WORKING RANGE

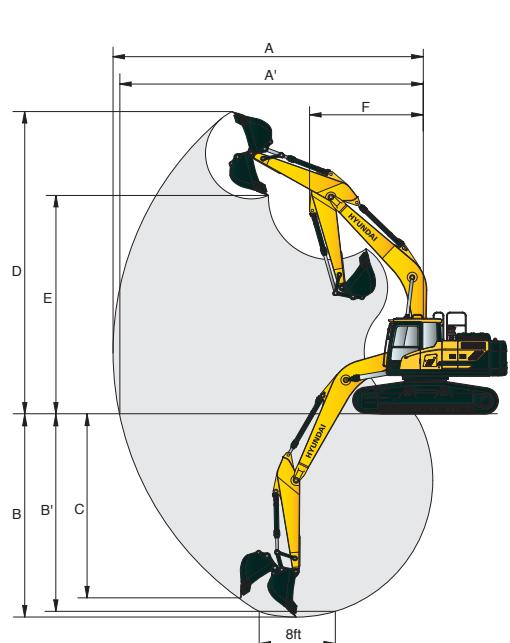


Unit : mm (ft-in)

Boom length		5,680 (18' 8")	
Arm length		2,000 (6' 7")	2,400 (7' 10")
A Max. digging reach		9,140 (30' 0")	9,500 (31' 2")
A' Max. digging reach on ground		8,920 (29' 3")	9,290 (30' 6")
B Max. digging depth		5,630 (18' 6")	6,010 (19' 9")
B' Max. digging depth (8' level)		5,390 (17' 8")	5,820 (19' 1")
C Max. vertical wall digging depth		5,090 (16' 8")	5,630 (18' 6")
D Max. digging height		9,330 (30' 7")	9,530 (31' 3")
E Max. dumping height		6,520 (21' 5")	6,710 (22' 0")
F Min. front swing radius		3,750 (12' 4")	3,740 (12' 3")

DIMENSIONS & WORKING RANGE

HX220 NL DIMENSIONS


5.65 m (18' 6") BOOM and 2.0 m (6' 7"); 2.4 m (7' 10") & 2.92 m (9' 7") ARM

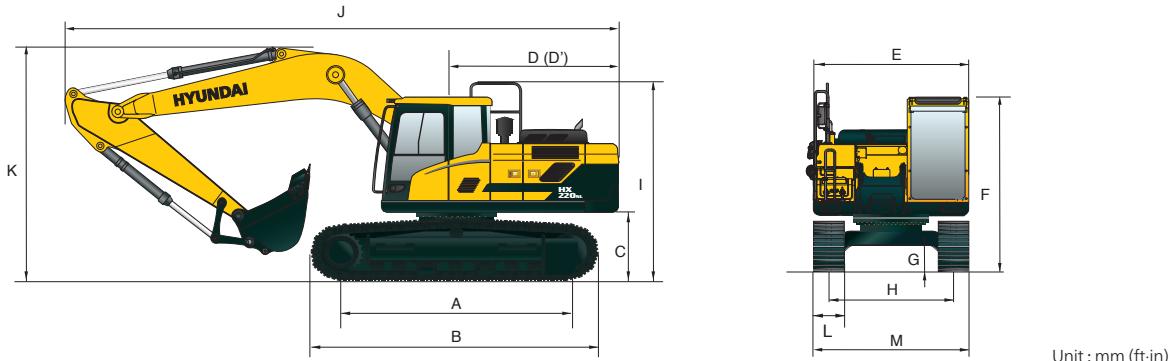

A	Tumbler distance	3,650 (12' 0")
B	Overall length of crawler	4,404 (14' 4")
C	Ground clearance of counterweight	1,060 (3' 6")
D	Tail swing radius	2,850 (9' 4")
D'	Rear-end length	2,770 (9' 1")
E	Overall width of upperstructure	2,530 (8' 4")
F	Overall height of cab	3,000 (9' 8")
G	Min. ground clearance	480 (1' 7")
H	Track gauge	2,000 (6' 7")
I	Overall height of guardrail	3,210 (10' 5")

	Boom length	5,650 (18' 6")	2,000 (6' 7")	2,400 (7' 10")	2,920 (9' 7")
J	Overall length	9,650 (31' 8")	9,570 (31' 5")	9,510 (31' 23")	
K	Overall height of boom	3,250 (10' 8")	3,170 (10' 5")	3,100 (10' 2")	
L	Track shoe width	500 (20")	600 (24")	700 (28")	
M	Overall width	2,500 (8' 2")	2,600 (8' 6")	2,700 (8' 10")	

HX220 NL WORKING RANGE

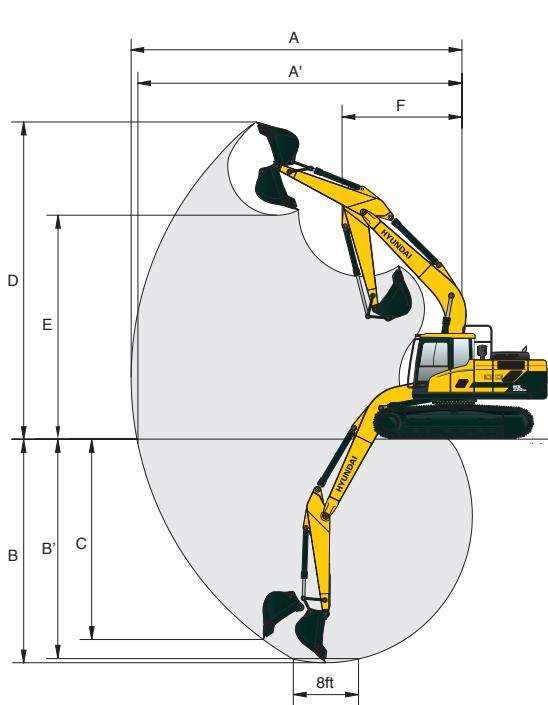

	Boom length	5,650 (18' 68")	2,000 (6' 7")	2,400 (7' 10")	2,920 (9' 7")
A	Max. digging reach	9,140 (30' 0")	9,500 (31' 2")	9,960 (32' 8")	
A'	Max. digging reach on ground	8,960 (29' 5")	9,340 (30' 8")	9,800 (32' 2")	
B	Max. digging depth	5,750 (18' 10")	6,150 (20' 2")	6,640 (21' 9")	
B'	Max. digging depth (8' level)	5,520 (18' 1")	5,950 (19' 6")	6,470 (21' 36")	
C	Max. vertical wall digging depth	5,320 (17' 5")	5,780 (19' 9")	6,250 (20' 6")	
D	Max. digging height	9,270 (30' 5")	9,500 (31' 2")	9,740 (31' 11")	
E	Max. dumping height	6,450 (21' 2")	6,660 (21' 10")	6,900 (22' 8")	
F	Min. front swing radius	3,710 (12' 2")	3,630 (11' 11")	3,580 (11' 9")	

DIMENSIONS & WORKING RANGE


HX220 NL 2-PIECE BOOM DIMENSIONS

5.65 m (18' 6") 2-Piece BOOM and 2.0 m (6' 7"); 2.4 m (7' 10") & 2.92 m (9' 7") ARM

Unit : mm (ft-in)

A Tumbler distance		3,650 (12' 0")	Boom length	5,650 (18' 6") 2-Piece Boom	
B Overall length of crawler		4,404 (14' 4")	Arm length	2,000 (6' 7")	2,400 (7' 10")
C Ground clearance of counterweight		1,060 (3' 6")	J Overall length	9,650 (31' 8")	9,570 (31' 5")
D Tail swing radius		2,850 (9' 4")	K Overall height of boom	3,200 (10' 6")	3,000 (9' 10")
D' Rear-end length		2,770 (9' 1")	L Track shoe width	500 (20")	600 (24")
E Overall width of upperstructure		2,530 (8' 4")	M Overall width	2,500 (8' 2")	2,600 (8' 6")
F Overall height of cab		3,000 (9' 8")			2,700 (8' 10")
G Min. ground clearance		480 (1' 7")			
H Track gauge		2,000 (6' 7")			
I Overall height of guardrail		3,210 (10' 5")			

HX220 NL 2-PIECE BOOM WORKING RANGE

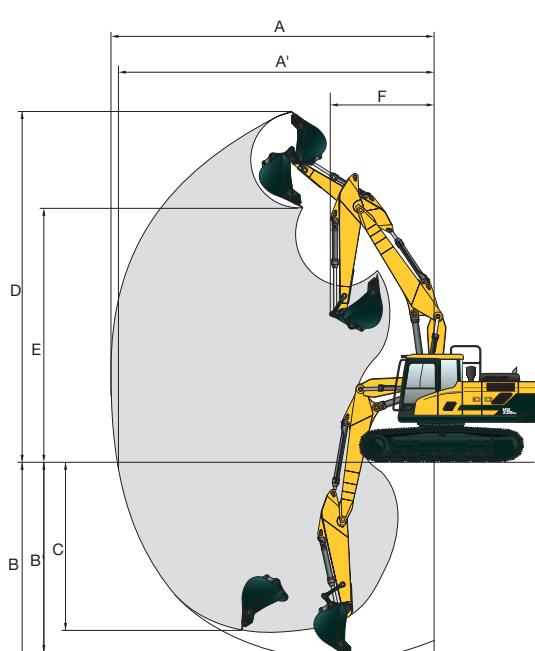

Unit : mm (ft-in)

Boom length	5,650 (18' 6") 2-Piece Boom		
Arm length	2,000 (6' 7")	2,400 (7' 10")	2,920 (9' 7")
A Max. digging reach	9,120 (29' 11")	9,530 (31' 3")	10,020 (32' 10")
A' Max. digging reach on ground	8,940 (29' 4")	9,360 (30' 9")	9,860 (32' 4")
B Max. digging depth	5,480 (18' 0")	5,890 (19' 4")	6,400 (21' 0")
B' Max. digging depth (8' level)	5,360 (17' 7")	5,770 (18' 11")	6,300 (20' 8")
C Max. vertical wall digging depth	4,560 (15' 0")	4,990 (16' 4")	5,530 (18' 2")
D Max. digging height	10,300 (33' 10")	10,670 (35' 0")	11,080 (36' 4")
E Max. dumping height	7,390 (24' 3")	7,740 (25' 5")	8,160 (26' 9")
F Min. front swing radius	2,870 (9' 5")	2,670 (8' 9")	2,530 (8' 4")

LIFTING CAPACITY



Rating over-front



Rating over-side or 360 degrees

HX220 L

5.68 m (18' 8") Boom; 2.00 m (6' 7") arm equipped with 0.92 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoes.

Load point height m (ft)		Load radius						At max. reach		Reach m (ft)	
		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)			
7.5 m (25 ft)	kg lb									*3970 *8750 *3970 *8750 6.65 (21.8)	
6.0 m (20 ft)	kg lb					*4400 *9700 *4400 *9700				*4020 *8860 3030 6680 7.78 (25.5)	
4.5 m (15 ft)	kg lb			*5690 *12540	*5690 *12540	*4820 *10630	4640 10230			*4140 *9130 2530 5580 8.43 (27.7)	
3.0 m (10 ft)	kg lb			*7420 *16360	6860 15120	*5570 *12280	4370 9630	*4780 *10540	3000 6610	4050 8930 2300 5070 8.74 (28.7)	
1.5 m (5 ft)	kg lb			*8940 *19710	6340 13980	*6340 *13980	4120 9080	5080 11200	2880 6350	3990 8800 2250 4960 8.73 (28.6)	
Ground Line	kg lb			*9640 *21250	6110 13470	*6860 *15120	3960 8730	4990 11000	2810 6190	4210 9280 2370 5220 8.42 (27.6)	
-1.5 m (-5 ft)	kg lb	*13940 *30730	12320 27160	*9580 *21120	6090 13430	*6950 *15320	3910 8620			4830 10650 2750 6060 7.76 (25.5)	
-3.0 m (-10 ft)	kg lb	*12450 *27450	*12450 *27450	*8770 *19330	6200 13670	*6310 *13910	4000 8820			*4800 *10580 3650 8050 6.61 (21.7)	
-4.5 m (-15 ft)	kg lb	*9410 *20750	*9410 *20750								

5.68 m (18' 8") Boom; 2.40 m (7' 10") arm equipped with 0.92 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoes.

Load point height m (ft)		Load radius						At max. reach		Reach m (ft)			
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity	
												m (ft)	
7.5 m (25 ft)	kg lb											*3660 *8070 3640 8020 7.15 (23.5)	
6.0 m (20 ft)	kg lb							*3970 *8750	*3970 *8750			*3730 *8220 2750 6060 8.20 (26.9)	
4.5 m (15 ft)	kg lb							*4450 *9810	*4450 *9810	*4190 *9240	3120 6880	*3860 *8510 2320 5110 8.82 (28.9)	
3.0 m (10 ft)	kg lb					*6850 *15100	*6850 *15100	*5240 *11550	4410 9720	*4520 *9960	3010 6640	3760 8290 2120 4670 9.11 (29.9)	
1.5 m (5 ft)	kg lb					*8510 *18760	6400 14110	*6080 *13400	4130 9110	*4930 *10870	2880 6350	3710 8180 2070 4560 9.10 (29.9)	
Ground Line	kg lb			*8830 *19470	*8830 *19470	*9440 *20810	6100 13450	*6700 *14770	3940 8690	4960 10930	2770 6110	3890 8580 2170 4780 8.18 (26.8)	
-1.5 m (-5 ft)	kg lb	*9800 *21610	*9800 *21610	*13550 *29870	12120 26720	*9610 *21190	6020 13270	*6920 *15260	3860 8510			4400 9700 2480 5470 7.12 (23.4)	
-3.0 m (-10 ft)	kg lb	*14180 *31260	*14180 *31260	*13180 *29060	12340 27210	*9040 *19930	6100 13450	*6540 *14420	3900 8600			*4660 *10270 3190 7030	
-4.5 m (-15 ft)	kg lb			*10580 *23320	*10580 *23320	*7350 *16200	6350 14000						

1. Lifting capacity are based on SAE J1097 and ISO 10567.

2. Lifting capacity of the HX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook located on the back of the bucket.

4. (*) indicates load limited by hydraulic capacity.

LIFTING CAPACITY

 Rating over-front  Rating over-side or 360 degrees

HX220 L

5.68 m (18' 8") Boom; 2.92 m (9' 7") arm equipped with 0.92 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoes.

Load point height m (ft)	kg lb	Load radius					At max. reach		
		1.5 m (5 ft)  	3.0 m (10 ft)  	4.5 m (15 ft)  	6.0 m (20 ft)  	7.5 m (25 ft)  	Capacity  	Reach m (ft)	
7.5 m (25 ft)	kg lb						*3310 *7300	3140 6920 (25.5)	
6.0 m (20 ft)	kg lb						*2300 *5070	*2300 *3400 *5070 *7500 2450 5400 (28.7)	
4.5 m (15 ft)	kg lb						*3970 *8750 *3780 *8750	3170 6990 2090 4610 9.32 (30.6)	
3.0 m (10 ft)	kg lb		*9720 *21430	*9720 *21430	*6100 *13450	*6100 *13450	*4790 *10560 *4460 *9830 *9220 6680 7580 4210 (31.5)	3030 9830 4150 6990 2870 6330 7450 4100	
1.5 m (5 ft)	kg lb		*8850 *19510	*8850 *19510	*7900 *17420	6500 14330	*5700 *12570	*4660 *10270 2870 6330 3380 1860 4100 (31.5)	
Ground Line	kg lb		*9590 *21140	*9590 *21140	*9100 *20060	6100 13450	*6440 *14200	3920 8640 4930 10870 2740 6040 3520 1930 9.31	
-1.5 m (-5 ft)	kg lb	*8840 *19490	*8840 *19490	*12650 *27980	11920 26280	*9540 *21030	5940 13100	*6810 *15010	3800 8380 4860 10710 2680 5910 3910 2170 8.72
-3.0 m (-10 ft)	kg lb	*12230 *26960	*12230 *26960	*13910 *30670	12080 26630	*9260 *20410	5960 13140	*6690 *14750	3800 8380 *4420 *9740 2700 5950 (25.4)
-4.5 m (-15 ft)	kg lb		*11800 *26010	*11800 *26010	*8060 *17770	6150 13560			*4280 *9440 4080 8990 (20.2)

5.68 m (18' 8") Boom; 3.90 m (12' 9") arm equipped with 0.92 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoes.

Load point height m (ft)	kg lb	Load radius						At max. reach								
		1.5 m (5 ft)  	3.0 m (10 ft)  	4.5 m (15 ft)  	6.0 m (20 ft)  	7.5 m (25 ft)  	9.0 m (30 ft)  	Capacity  	Reach m (ft)							
9.0 m (30 ft)	kg lb							*2700 *5950	*2700 *5950 (25.1)							
7.5 m (25 ft)	kg lb						*1940 *4280	*1940 *4280	*2760 *6080 *2760 *6080 8.94 (29.3)							
6.0 m (20 ft)	kg lb						*2790 *6150	*2790 *6150	*2850 *6280 2600 5730 9.77 (32.1)							
4.5 m (15 ft)	kg lb						*3050 *6720	*3050 *6720	*2000 *4410 *2000 *4410 *2970 *6550 2300 5070 10.28 (33.7)							
3.0 m (10 ft)	kg lb						*3900 *8600	*3900 *8600	*3510 *7740	*2870 *7740	*2870 *6330 2860 6310 *3110 *6860 2140 4720 10.52 (34.5)					
1.5 m (5 ft)	kg lb		*11080 *24430	*11080 *24430	*6600 *14550	*6600 *14550	*4900 *10800	*4900 *10800	*4080 *8990	3820 8420	*3410 *7520	2760 6080	3080 6790	2090 4610	10.52 (34.5)	
Ground Line	kg lb	*5300 *11680	*5300 *11680	*10640 *23460	*10640 *23460	*8200 *18080	*8200 *18080	*5820 *12830	*5210 11490	*4610 *10160	3630 8000	*3490 *7690	2660 5860	3180 7010	2150 4740	10.27 (33.7)
-1.5 m (-5 ft)	kg lb	*7540 *16620	*7540 *16620	*11690 *25770	*11690 *25770	*9110 *20080	7900 17420	*6440 *14200	4990 11000	*4990 *11000	3510 7740	*2330 *5140	*2330 *5140	3450 7610	2340 5160	9.75 (32.0)
-3.0 m (-10 ft)	kg lb	*10030 *22110	*10030 *22110	*14390 *31720	*14390 *31720	*9320 *20550	7800 17200	*6660 *14680	4910 10820	*5070 *11180	3470 7650			*3850 *5140	2750 7610	8.91 (29.2)
-4.5 m (-15 ft)	kg lb	*13000 *28660	*13000 *28660	*13310 *29340	*13310 *29340	*8780 *19360	7890 17390	*6290 *13870	4960 10930					*3990 *8800	3640 8020	7.62 (25.0)
-6.0 m (-20 ft)	kg lb						*10560 *23280	*10560 *23280	*7050 *15540							

1. Lifting capacity are based on SAE J1097 and ISO 10567.

2. Lifting capacity of the HX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook located on the back of the bucket.

4. (*) indicates load limited by hydraulic capacity.

LIFTING CAPACITY

 Rating over-front  Rating over-side or 360 degrees

HX220 L 2-PIECE BOOM

5.65 m (18' 6") 2-Piece Boom; 2.00 m (6' 7") arm equipped with 0.92 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoes.

Load point height m (ft)	Load radius								At max. reach				
	3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity	Reach			
									m (ft)				
10.5 m (35 ft) kg lb									*6180 *13620	*6180 *13620	4.64 (15.2)		
9.0 m (30 ft) kg lb									*6520 *14370	*6520 *14370	4.61 (15.1)		
7.5 m (25 ft) kg lb			*6710 *14790	*6710 *14790					*5270 *11620	4060 8950	6.67 (21.9)		
6.0 m (20 ft) kg lb			6780 15150	*6870 *15150	*5850 *12900	4780 10540			*4850 *10690	2970 6550	7.80 (25.6)		
4.5 m (15 ft) kg lb	*11340 *25000	*11340 *25000	*7750 *17090	7500 16530	*6130 *13510	4610 10160			4360 9610	2470 5450	8.45 (27.7)		
3.0 m (10 ft) kg lb			*8930 *19690	6810 15010	*6590 *14530	4330 9550	5200 11460	2950 6500	4030 8880	2250 4960	8.75 (28.7)		
1.5 m (5 ft) kg lb					*9600 *21160	6250 13780	*6900 *15210	4060 8950	5070 11180	2830 6240	3980 8770	2200 (28.7)	
Ground Line	kg lb				*9290 *20480	6020 13270	*6800 *14990	3890 8580	4990 11000	2760 6080	*3940 *8690	2330 5140	8.44 (27.7)
-1.5 m (-5 ft) kg lb	*9840 *21690	*9840 *21690	*8130 *17920	6010 13250	*6060 *13360	3850 8490			*3360 *7410	2710 5970	7.77 (25.5)		
-3.0 m (-10 ft) kg lb					*6030 *13290	*6030 *13290	*4250 *9370	3970 8750					

5.65 m (18' 6") 2-Piece Boom; 2.40 m (7' 10") arm equipped with 0.92 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoes.

Load point height m (ft)	Load radius								At max. reach			
	3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity	Reach		
									m (ft)			
9.0 m (30 ft) kg lb									*5690 *12540	*5690 *12540	5.40 (17.7)	
7.5 m (25 ft) kg lb			*5860 *12920	*5860 *12920					*4850 *10690	3560 7850	7.19 (23.6)	
6.0 m (20 ft) kg lb			*6410 *14130	*6410 *14130	*5520 *12170	4860 10710			*4510 *9940	2690 5930	8.23 (27.0)	
4.5 m (15 ft) kg lb	*10290 *22690	*10290 *22690	*7300 *16090	*7300 *16090	*5860 *12920	4670 10300	*4360 *9610	3080 6790	4020 8860	2260 4980	8.85 (29.0)	
3.0 m (10 ft) kg lb			*8550 *18850	6940 15300	*6370 *14040	4370 9630	*5170 *11140	2960 6530	3740 8250	2060 4540	9.14 (30.0)	
1.5 m (5 ft) kg lb			*9440 *20810	6320 13930	*6780 *14950	4070 8970	5070 11180	2820 6220	3690 8140	2020 4450	9.13 (30.0)	
Ground Line	kg lb	*8600 *18960	*8600 *18960	*9420 *20770	6000 13230	*6820 *15040	3870 8530	4960 10930	2720 6000	*3760 *8290	2120 4670	8.84 (29.0)
-1.5 m (-5 ft) kg lb	*11240 *24780	*11240 *24780	*8510 *18760	5930 13070	*6280 *13850	3800 8380	*4460 *9830	2710 5970	*3310 *7300	2440 5380	8.21 (26.9)	
-3.0 m (-10 ft) kg lb					*6700 *14770	6040 13320	*4870 *10740	3860 8510				

1. Lifting capacity are based on SAE J1097 and ISO 10567.

2. Lifting capacity of the HX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook located on the back of the bucket.

4. (*) indicates load limited by hydraulic capacity.

LIFTING CAPACITY

 Rating over-front  Rating over-side or 360 degrees

HX220 L 2-PIECE BOOM

5.65 m (18' 6") 2-Piece Boom; 2.92 m (9' 7") arm equipped with 0.92 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoes.

Load point height m (ft)		Load radius								At max. reach		
		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity	Reach	
												m (ft)
9.0 m (30 ft)	kg lb			*3290 *7250	*3290 *7250					*4590 *10120	*4590 *10120	6.28 (20.6)
7.5 m (25 ft)	kg lb					*3520 *7760	*3520 *7760			*4020 *8860	3060 6750	7.83 (25.7)
6.0 m (20 ft)	kg lb			*5160 *11380	*5160 *11380	*4870 *10740	*4870 *10740	*2440 *5380	*2440 *5380	*3790 *8360	2370 5220	8.79 (28.8)
4.5 m (15 ft)	kg lb			*6680 *14730	*6680 *14730	*5480 *12080	4750 10470	*4380 *9660	3140 6920	3650 8050	2020 4450	9.36 (30.7)
3.0 m (10 ft)	kg lb	*12620 *27820	*12620 *27820	*8000 *17640	7130 15720	*6060 *13360	4430 9770	*4970 *10960	2990 6590	3400 7500	1850 4080	9.63 (31.6)
1.5 m (5 ft)	kg lb	*8680 *19140	*8680 *19140	*9130 *20130	6430 14180	*6580 *14510	4100 9040	5070 11180	2820 6220	3350 7390	1800 3970	9.63 (31.6)
Ground Line	kg lb	*9390 *20700	*9390 *20700	*9450 *20830	6000 13230	*6780 *14950	3850 8490	4930 10870	2690 5930	3500 7720	1880 4140	9.35 (30.7)
-1.5 m (-5 ft)	kg lb	*12500 *27560	11770 25950	*8880 *19580	5850 12900	*6460 *14240	3730 8220	*4770 *10520	2630 5800	*3200 *7050	2130 4700	8.77 (28.8)
-3.0 m (-10 ft)	kg lb	*9950 *21940	*9950 *21940	*7420 *16360	5890 12990	*5420 *11950	3750 8270					

1. Lifting capacity are based on SAE J1097 and ISO 10567.

2. Lifting capacity of the HX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook located on the back of the bucket.

4. (*) indicates load limited by hydraulic capacity.

LIFTING CAPACITY



Rating over-front



Rating over-side or 360 degrees

HX220 L LONG REACH

8.2 m (26' 11") Boom; 6.3 m (20' 8") arm equipped with 0.52 m³ (SAE heaped) bucket and 800 mm (32") triple grouser shoes.

Load point height m (ft)	kg lb	Load radius							At max. reach	
		4.5 m (15 ft) 	6.0 m (20 ft) 	7.5 m (25 ft) 	9.0 m (30 ft) 	10.5 m (35 ft) 	12.0 m (40 ft) 	13.5 m (45 ft) 	Capacity 	Reach m (ft)
10.5 m (35 ft)	kg lb								*1470 *1470 *3240 *3240	12.11 (39.7)
9.0 m (30 ft)	kg lb								*1490 *1490 *2050 *2050	13.11 (43.0)
7.5 m (25 ft)	kg lb								*1540 *1540 *3400 *3400	13.84 (45.4)
6.0 m (20 ft)	kg lb								*1580 *1600 *3510 *3510	14.37 (47.1)
4.5 m (15 ft)	kg lb								*1770 *1770 *3900 *3900	14.72 (48.3)
3.0 m (10 ft)	kg lb			*2500 *2500 *5510 *5510	*2200 *2200 *4850 *4850	*1590 *1590 *3530 *3530	*1600 *1600 *3530 *3530	*1710 *1710 *3770 *3770	*1260 *1260 *2780 *2780	*1580 1190 *3480 2620
1.5 m (5 ft)	kg lb	*5570 *5570 *12280 *12280	*3900 *3900 *8600 *8600	*3060 *3060 *6750 *6750	*2560 *2560 *5640 *5640	*2240 2050 *4940 4520	*2030 1570 *4480 3460	*1790 1200 *3950 2650	*1780 970 *3920 2140	14.90 (48.9)
Ground Line	kg lb	*6930 6870 *15280 15150	*4720 4590 *10410 10120	*3580 3320 *7890 7320	*2910 2490 *6420 5490	*2490 1910 *5490 4210	*2200 1480 *4850 3260	*1820 1140 *4010 2510	*1860 960 *4100 2120	14.75 (48.4)
-1.5 m (-5 ft)	kg lb	*7750 6340 *17090 13980	*5330 4220 *11750 9300	*4020 3060 *8860 6750	*3220 2320 *7100 5110	*2700 1790 *5950 3950	*2350 1400 *5180 3090	*1570 1100 *3460 2430	*1960 990 *4320 2180	14.42 (47.3)
-3.0 m (-10 ft)	kg lb	*8150 6120 *17970 13490	*5720 4000 *12610 8820	*4330 2890 *9550 6370	*3450 2190 *7610 4830	*2870 1700 *6330 3750	*2460 1340 *5420 2950		*2060 1050 *4540 2310	13.92 (45.7)
-4.5 m (-15 ft)	kg lb	*8220 6060 *18120 13360	*5890 3910 *12990 8620	*4490 2810 *9900 6190	*3590 2120 *7910 4670	*2960 1660 *6530 3660	*2490 1330 *5490 2930		*2180 1170 *4810 2580	13.20 (43.3)
-6.0 m (-20 ft)	kg lb	*8020 6130 *17680 13510	*5840 3920 *12870 8640	*4500 2790 *9920 6150	*3600 2110 *7940 4650	*2940 1660 *6480 3660			*2310 1370 *5090 3020	12.25 (40.2)
-7.5 m (-25 ft)	kg lb	*7500 6310 *16530 13910	*5550 4010 *12240 8840	*4300 2850 *9480 6280	*3420 2170 *7540 4780	*2700 1730 *5950 3810			*2430 1710 *5360 3770	10.97 (36.0)
-9.0 m (-30 ft)	kg lb	*6570 6570 *14480 14480	*4920 4200 *10850 9260	*3790 3000 *8360 6610	*2890 2320 *6370 5110					
-10.5 m (-35 ft)	kg lb	*4970 *4970 *10960 *10960	*3680 *3680 *8110 *8110							

1. Lifting capacity are based on SAE J1097 and ISO 10567.

2. Lifting capacity of the HX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook located on the back of the bucket.

4. (*) indicates load limited by hydraulic capacity.

LIFTING CAPACITY

 Rating over-front  Rating over-side or 360 degrees

HX220 L HIGH WALKER

5.68 m (18' 8") Boom; 2.00 m (6' 7") arm equipped with 0.92 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoes.

Load point height m (ft)	kg lb	Load radius				At max. reach				
		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity
										Reach
7.5 m (25 ft)	kg lb									*3970 *3970 *8750 *8750 (21.8)
6.0 m (20 ft)	kg lb				*4400 *4400 *9700 *9700					*4020 3920 *8860 8640 (25.5)
4.5 m (15 ft)	kg lb			*5690 *5690 *12540 *12540	*4820 *4820 *10630 *10630					*4140 3330 *9130 7340 (27.7)
3.0 m (10 ft)	kg lb			*7420 *7420 *16360 *16360	*5570 *5570 *12280 *12280	*4780 3930 *10540 8660				*4300 3060 *9480 6750 (28.7)
1.5 m (5 ft)	kg lb			*8940 8430 *19710 18580	*6340 5420 *13980 11950	*5140 3810 *11330 8400				4300 3010 9480 6640 (28.6)
Ground Line	kg lb			*9640 8190 *21250 18060	*6860 5250 *15120 11570	*5370 3730 *11840 8220				4540 3170 10010 6990 (27.6)
-1.5 m (-5 ft)	kg lb	*13940 *13940 *30730 *30730	*9580 8160 *21120 17990		*6950 5190 *15320 11440					*4840 3630 *10670 8000 (25.5)
-3.0 m (-10 ft)	kg lb	*12450 *12450 *27450 *27450	*8770 8290 *19330 18280		*6310 5290 *13910 11660					*4800 4780 *10580 10540 (21.7)
-4.5 m (-15 ft)	kg lb	*9410 *9410 *20750 *20750								

5.68 m (18' 8") Boom; 2.40 m (7' 10") arm equipped with 0.92 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoes.

Load point height m (ft)	kg lb	Load radius					At max. reach			
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)	7.5 m (25 ft)	Capacity
										Reach
7.5 m (25 ft)	kg lb									*3660 *3660 *8070 *8070 (23.5)
6.0 m (20 ft)	kg lb									*3730 3580 *8220 7890 (26.9)
4.5 m (15 ft)	kg lb									*3860 3070 *8510 6770 (28.9)
3.0 m (10 ft)	kg lb				*6850 *6850 *15100 *15100	*5240 *5240 *11550 *11550	*4520 3940 *9960 8690	*4020 2840 *8860 6260 (29.9)		
1.5 m (5 ft)	kg lb				*8510 8500 *18760 18740	*6080 5430 *13400 11970	*4930 3810 *10870 8400	4010 2780 8840 6130 (29.9)		
Ground Line	kg lb				*8830 *8830 *19470 *19470	*9440 8180 *20810 18030	*6700 5230 *14770 11530	*5250 3700 *11570 8160	4200 2920 9260 6440 (28.9)	
-1.5 m (-5 ft)	kg lb	*9800 *9800 *21610 *21610	*13550 *13550 *29870 *29870	*9610 8090 *21190 17840	*6920 5140 *15260 11330					*4590 3300 *10120 7280 (26.8)
-3.0 m (-10 ft)	kg lb	*14180 *14180 *31260 *31260	*13180 *13180 *29060 *29060	*9040 8170 *19930 18010	*6540 5190 *14420 11440					*4660 4190 *10270 9240 (23.4)
-4.5 m (-15 ft)	kg lb				*10580 *10580 *23320 *23320	*7350 *7350 *16200 *16200				

1. Lifting capacity are based on SAE J1097 and ISO 10567.

2. Lifting capacity of the HX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook located on the back of the bucket.

4. (*) indicates load limited by hydraulic capacity.

LIFTING CAPACITY

 Rating over-front  Rating over-side or 360 degrees

HX220 L HIGH WALKER

5.68 m (18' 8") Boom; 2.92 m (9' 7") arm equipped with 0.92 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoes.

Load point height m (ft)		Load radius										At max. reach	
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity	Reach
													m (ft)
7.5 m (25 ft)	kg lb											*3310 *7300	7.78 (25.5)
6.0 m (20 ft)	kg lb											*2300 *5070	3210 7080
4.5 m (15 ft)	kg lb											*3970 *8750	*3780 *8330
3.0 m (10 ft)	kg lb											*4790 *10560	*4180 *9220
1.5 m (5 ft)	kg lb											*3970 *8750	3870 8750
Ground Line	kg lb											*4790 *10560	*4180 *9220
-1.5 m (-5 ft)	kg lb	*8840 *19490	*8840 *19490	*12650 *27890	*12650 *27890	*9540 *21030	8010 17660	*6440 *15010	5210 11200	*5060 *11160	3670 8090	*3680 *5690	2580 (31.5)
-3.0 m (-10 ft)	kg lb	*12230 *26960	*12230 *26960	*13910 *30670	*13910 *30670	*9260 *20410	8040 17730	*6690 *14750	5080 11200			*4420 *9740	3590 7910
-4.5 m (-15 ft)	kg lb											*4280 *9440	*4280 *9440
		*11800 *26010	*11800 *26010	*8060 *17770	*8060 *17770							6.16 (20.2)	

5.68 m (18' 8") Boom; 3.90 m (12' 9") arm equipped with 0.92 m³ (SAE heaped) bucket and 600 mm (24") triple grouser shoes.

Load point height m (ft)		Load radius										At max. reach			
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		9.0 m (30 ft)		Capacity	Reach
														m (ft)	
9.0 m (30 ft)	kg lb											*2700 *5950	*2700 *5950	7.66 (25.1)	
7.5 m (25 ft)	kg lb											*1940 *4280	*1940 *4280	8.94 29.3	
6.0 m (20 ft)	kg lb											*2790 *6150	*2790 *6150	2600 (32.1)	
4.5 m (15 ft)	kg lb											*3050 *6720	*3050 *6720	2300 (33.7)	
3.0 m (10 ft)	kg lb											*3900 *8600	*3900 *8600	*3510 *7740	
1.5 m (5 ft)	kg lb											*3900 *14550	*3900 *10800	*3510 *8990	
Ground Line	kg lb	*5300 *11680	*5300 *11680	*10640 *23460	*10640 *23460	*8200 *18080	*8200 *18080	*5820 *12830	5210 11490	*4610 *10160	3630 8000	*3490 *7690	2660 5860	3180 7010	2150 4740
-1.5 m (-5 ft)	kg lb	*7540 *16620	*7540 *16620	*11690 *25770	*11690 *25770	*9110 *20080	7900 17420	*6440 *14200	4990 11000	*4990 *11000	3510 7740	*2330 *5140	*2330 *5140	3450 7610	2340 5160
-3.0 m (-10 ft)	kg lb	*10030 *22110	*10030 *22110	*14390 *31720	*14390 *31720	*9320 *20550	7800 17200	*6660 *14680	4910 10820	*5070 *11180	3470 7650			*3850 *8490	2750 6060
-4.5 m (-15 ft)	kg lb	*13000 *28660	*13000 *28660	*13310 *29340	*13310 *29340	*8780 *19360	7890 17390	*6290 *13870	4960 10930					*3990 *8800	3640 8020
-6.0 m (-20 ft)	kg lb														

1. Lifting capacity are based on SAE J1097 and ISO 10567.

2. Lifting capacity of the HX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook located on the back of the bucket.

4. (*) indicates load limited by hydraulic capacity.

LIFTING CAPACITY

 Rating over-front  Rating over-side or 360 degrees

HX220 NL

5.65 m (18' 6") Boom; 2.00 m (6' 7") arm equipped with 0.87 m³ (SAE heaped) bucket and 500 mm (20") triple grouser shoes.

Load point height m (ft)	kg lb	Load radius					At max. reach			
		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity
										Reach
7.5 m (25 ft)	kg lb									*4000 3810 6.61 *8820 8400 (21.7)
6.0 m (20 ft)	kg lb				*4420 4380 *9740 9660					*4060 2800 7.75 *8950 6170 (25.4)
4.5 m (15 ft)	kg lb		*5670 *5670 *12500 *12500		*4840 4230 *10670 9330					*4200 2340 8.41 *9260 5160 (27.6)
3.0 m (10 ft)	kg lb		*7430 6170 *16380 13600		*5600 3990 *12350 8800		*4830 2750 *10650 6060			*4360 2130 8.71 *9610 4700 (28.6)
1.5 m (5 ft)	kg lb		*8990 5700 *19820 12570		*6390 3760 *14090 8290		*5190 2640 *11440 5820			4330 2080 8.71 9550 4590 (28.6)
Ground Line	kg lb		*9720 5490 *21430 12100		*6930 3610 *15280 7960		5380 2570 11860 5670			4570 2190 8.40 10080 4830 (27.6)
-1.5 m (-5 ft)	kg lb	*14170 10580 *31240 23320		*9690 5460 *21360 12040		*7030 3560 *15500 7850				*4930 2540 7.73 *10870 5600 (25.4)
-3.0 m (-10 ft)	kg lb	*12680 10790 *27950 23790		*8900 5570 *19620 12280		*6390 3650 *14090 8050				*4910 3380 6.58 *10820 7450 (21.6)

5.65 m (18' 6") Boom; 2.00 m (6' 7") arm equipped with 0.87 m³ (SAE heaped) bucket and 500 mm (20") triple grouser shoes.

Load point height m (ft)	kg lb	Load radius					At max. reach					
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity
												Reach
7.5 m (25 ft)	kg lb											*3690 3360 7.12 *8140 7410 (23.4)
6.0 m (20 ft)	kg lb						*3990 *3990 *8800 *8800					*3780 2540 8.18 *8330 5600 (26.8)
4.5 m (15 ft)	kg lb						*4460 4280 *9830 9440		*4050 2860 *8930 6310			*3910 2140 8.80 *8620 4720 (28.9)
3.0 m (10 ft)	kg lb				*6850 6280 *15100 13850		*5260 4020 *11600 8860		*4560 2760 *10050 6080			*4080 1950 9.09 *8990 4300 (29.8)
1.5 m (5 ft)	kg lb				*8540 5750 *18830 12680		*6120 3760 *13490 8290		*4980 2630 *10980 5800			4030 1910 9.08 8880 4210 (29.8)
Ground Line	kg lb			*9080 *9080 *20020 *20020		*9520 5470 *20990 12060		*6760 3580 *14900 7890		*5310 2540 *11710 5600		4220 2000 8.79 9300 4410 (28.8)
-1.5 m (-5 ft)	kg lb	*9930 *9930 *21890 *21890		*13780 10400 *30380 22930		*9710 5400 *21410 11900		*6990 3510 *15410 7740				*4670 2280 8.16 *10300 5030 (26.8)
-3.0 m (-10 ft)	kg lb	*14320 *14320 *31570 *31570		*13400 10600 *29540 23370		*9170 5470 *20220 12060		*6630 3550 *14620 7830				*4750 2940 7.09 *10470 6480 (23.3)
-4.5 m (-15 ft)	kg lb			*10790 *10790 *23790 *23790		*7470 5710 *16470 12590						

1. Lifting capacity are based on SAE J1097 and ISO 10567.

2. Lifting capacity of the HX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook located on the back of the bucket.

4. (*) indicates load limited by hydraulic capacity.

LIFTING CAPACITY



Rating over-front



Rating over-side or 360 degrees

HX220 NL

5.65 m (18' 6") Boom; 2.92 m (9' 7") arm equipped with 0.87 m³ (SAE heaped) bucket and 500 mm (20") triple grouser shoes.

Load point height m (ft)	kg lb	Load radius										At max. reach		
		1.5 m (5 ft)		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity	Reach	
												m (ft)		
7.5 m (25 ft)	kg lb											*3350	2890	7.76
												*7390	6370	(25.5)
6.0 m (20 ft)	kg lb											*2140	*2140	8.73
												*4720	*4720	(28.6)
4.5 m (15 ft)	kg lb											*3970	*3970	9.30
												*8750	*8750	(30.5)
3.0 m (10 ft)	kg lb											*4810	4060	9.58
												*4210	2770	3730
												*10600	8950	1750
												*9280	6110	3860
1.5 m (5 ft)	kg lb											*5730	3780	9.57
												*4700	2630	(31.4)
Ground Line	kg lb											*12630	8330	3680
												*10360	5800	1710
												8110	3770	(28.6)
-1.5 m (-5 ft)	kg lb											*9810	*9810	9.29
												*6490	3560	3830
												*5120	2510	1780
												7850	*11290	8440
												5530	3920	(30.5)
-3.0 m (-10 ft)	kg lb											*21630	*21630	8.71
												*12850	10220	4250
												*19730	*19730	2000
												*28330	22530	(28.6)
												*13430	*13430	4410
												*17230	11730	9370
												*12340	*12340	4490
												*14120	10360	2490
												*31130	22840	*9900
												*20680	11770	5490
												*14930	7610	(25.4)
-4.5 m (-15 ft)	kg lb											*12010	10690	6.14
												*26480	23570	3750
												*18030	12150	*9610
														8270
														(20.1)

HX220 NL 2-PIECE BOOM

5.65 m (18' 6") 2-Piece Boom; 2.00 m (6' 7") arm equipped with 0.87 m³ (SAE heaped) bucket and 500 mm (20") triple grouser shoes.

Load point height m (ft)	kg lb	Load radius										At max. reach		
		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity	Reach			
												m (ft)		
10.5 m (35 ft)	kg lb											*6200	*6200	4.64
												*13670	*13670	(15.2)
9.0 m (30 ft)	kg lb											*6560	*6560	4.60
												*14460	*14460	(15.1)
7.5 m (25 ft)	kg lb											*5330	3710	6.66
												*11750	8180	(21.9)
6.0 m (20 ft)	kg lb											*4920	2720	7.79
												*10850	6000	(25.6)
4.5 m (15 ft)	kg lb											4680	2270	8.45
												10320	5000	(27.7)
3.0 m (10 ft)	kg lb											*9020	6090	8.75
												*19890	13430	2060
												*6670	3930	(28.7)
1.5 m (5 ft)	kg lb											*14700	8660	8.75
												*11860	5950	4540
Ground Line	kg lb											*5410	2590	2020
												*11930	5710	4450
												9480	4450	(28.7)
												*5130	2520	8.43
-1.5 m (-5 ft)	kg lb											*105050	*105050	7.77
												*22160	*22160	(25.5)
-3.0 m (-10 ft)	kg lb											*8270	5380	7.77
												*18230	11860	7580
												*13600	7720	5490
														(25.5)

1. Lifting capacity are based on SAE J1097 and ISO 10567.

2. Lifting capacity of the HX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook located on the back of the bucket.

4. (*) indicates load limited by hydraulic capacity.

LIFTING CAPACITY

 Rating over-front  Rating over-side or 360 degrees

HX220 NL 2-PIECE BOOM

5.65 m (18' 6") 2-Piece Boom; 2.40 m (7' 10") arm equipped with 0.87 m³ (SAE heaped) bucket and 500 mm (20") triple grouser shoes.

Load point height m (ft)	kg lb	Load radius								At max. reach		
		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity	Reach	
										m (ft)		
9.0 m (30 ft)	kg lb									*5730	5470	5.39
7.5 m (25 ft)	kg lb			*5870	*5870					*12630	12060	(17.7)
6.0 m (20 ft)	kg lb			*12940	*12940					*4900	3260	7.18
4.5 m (15 ft)	kg lb	*10330 *22770	*10330 *22770	*7350 *16200	6840 15080	*5920 *13050	4240 9350	*4360 *9610	2820 6220	4330	2070	8.84
3.0 m (10 ft)	kg lb			*19030	13690	*6440 *14200	*12280	3960 9740	2710	4040	1890	9.13
1.5 m (5 ft)	kg lb			*21050	12460	*5650 *15150	3700 8160	*5240 *11550	2580	3990	1850	9.13
Ground Line	kg lb	*8600 *18960	*8600 *18960	*9560 *21080	5370 11840	*6920 *15260	3510 7740	*5230 *11530	2490	*3840 *8470	1950 4300	8.83 (29.0)
-1.5 m (-5 ft)	kg lb	*11450 *25240	10280 22660	*8660 *19090	5310 11710	*6390 *14090	3450 7610	*4540 *10010	2470 5450	*3390 *7470	2230 4920	2.21 (26.9)
-3.0 m (-10 ft)	kg lb			*6840 *15080	5400 11900	*4980 *10980	3510 7740					

5.65 m (18' 6") 2-Piece Boom; 2.92 m (9' 7") arm equipped with 0.87 m³ (SAE heaped) bucket and 500 mm (20") triple grouser shoes.

Load point height m (ft)	kg lb	Load radius								At max. reach		
		3.0 m (10 ft)		4.5 m (15 ft)		6.0 m (20 ft)		7.5 m (25 ft)		Capacity	Reach	
										m (ft)		
9.0 m (30 ft)	kg lb			*3290 *7250	*3290 *7250					*4600	4260	6.28
7.5 m (25 ft)	kg lb					*3530 *7780	*3530 *7780			*10140	9390	(20.6)
6.0 m (20 ft)	kg lb			*5170 *11400	*5170 *11400	*4870 *10740	4510 9940	*2440 *5380	*2440 *5380	*4030	2800	7.83
4.5 m (15 ft)	kg lb			*6720 *14820	*6720 *14820	*5540 *12210	4310 9500	*4390 *9680	2860 6310	*8880	6170	(25.7)
3.0 m (10 ft)	kg lb	*12710 *28020	12080 26630	*8080 *17810	6370 14040	*6130 *13510	4020 8860	*5040 *11110	2720 6000	3690	1690	9.63
1.5 m (5 ft)	kg lb	*8700 *19180	*8700 *19180	*9240 *20370	5740 12650	*6660 *14680	3720 8200	*5240 *11550	2570 5670	3640	1650	9.63
Ground Line	kg lb	*9390 *20700	*9390 *20700	*9580 *21120	5360 11820	*6880 *15170	3490 7690	*5260 *11600	2450 5400	*3610	1720	9.35
-1.5 m (-5 ft)	kg lb	*12500 *27560	10070 22200	*9020 *19890	5230 11530	*6570 *14480	3380 7450	*4860 *10710	2400 5290	*3270	1950	8.77
-3.0 m (-10 ft)	kg lb	*10150 *22380	*10150 *22380	*7560 *16670	5270 11620	*5530 *12190	3400 7500			*7210	4300	(28.8)

1. Lifting capacity are based on SAE J1097 and ISO 10567.

2. Lifting capacity of the HX series does not exceed 75% of tipping load with the machine on firm, level ground or 87% of full hydraulic capacity.

3. The load point is a hook located on the back of the bucket.

4. (*) indicates load limited by hydraulic capacity.

SPECIFICATIONS

HX220 L

	STD	OPT
ENGINE		
Cummins QSB 6.7 engine	●	
HYDRAULIC SYSTEM		
Intelligent Power Control (IPC)		
3-power mode, 2-work mode, user mode	●	
Variable Power Control	●	
Pump Flow Control	●	
Attachment Mode Flow Control		●
Engine Auto Idle	●	
Engine Auto Shutdown Control		●
Electronic Fan Control	●	
CABIN & INTERIOR		
ISO Standard cabin		
Rise-up type windshield wiper	●	
Radio / USB player	●	
Handsfree mobile phone system with USB	●	
12 volt power outlet (24V DC to 12V DC converter)	●	
Electric horn	●	
All-weather steel cab with 360° visibility	●	
Safety glass windows	●	
Sliding fold-in front window	●	
Sliding side window (LH)	●	
Lockable door	●	
Hot & cool box	●	
Storage compartment & Ashtray	●	
Transparent cabin roof-cover	●	
Sun visor	●	
Door and cab locks, one key	●	
Mechanical suspension seat with heater	●	
Pilot-operated slideable joystick	●	
Console box height adjust system	●	
Automatic climate control		
Air conditioner & heater	●	
Defroster	●	
Starting Aid (air grid heater) for cold weather	●	
Centralized monitoring		
8" LCD display	●	
Engine speed or Trip meter/Accel.	●	
Engine coolant temperature gauge	●	
Max power	●	
Low speed/High speed	●	
Auto idle	●	
Overload	●	
Check Engine	●	
Air cleaner clogging	●	
Indicators	●	
ECO Gauges	●	
Fuel level gauge	●	
Hyd. oil temperature gauge	●	
Fuel warmer	●	
Warnings	●	
Communication error	●	
Low battery	●	
Clock	●	
Cabin lights	●	
Cabin front window rain guard	●	
Cabin roof-steel cover	●	
Seat		
Adjustable air suspension seat with heater		●
Cabin FOPS/FOG (ISO/DIS 10262) Level 2		
FOPS (Falling Object Protective Structure) · ISO 3449 Level 2		●
FOG (Falling Object Guard)		●
Cabin ROPS (ISO 12117-2)		
ROPS (Roll Over Protective Structure)	●	
SAFETY		
Battery master switch	●	
Rearview camera	●	
AAVM (Advanced Around View Monitoring)		●
Four front working lights	●	
Travel alarm	●	
Rear work lamp	●	
Beacon lamp		●
Automatic swing brake	●	
Boom holding system	●	
Arm holding system	●	
Safety lock valve for boom cylinder with overload warning device	●	
Safety lock valve for arm cylinder		●
Swing Lock System		●
Three outside rearview mirrors	●	
OTHER		
Booms		
5.68 m; 18' 8" Mono boom	●	
5.65 m; 18' 6" 2-Piece boom		●
8.2 m; 26' 11" Long reach		●
Arms		
2.0 m; 6' 7"		●
2.4 m; 7' 10"		●
2.92 m; 9' 7"		●
3.9 m; 12' 10"		●
6.3 m; 20' 8" Long reach		●
Removable clean-out dust net for cooler	●	
Removable reservoir tank	●	
Fuel pre-filter	●	
Fuel warmer	●	
Self-diagnostics system	●	
Hi MATE (Remote Management System)	●	
Batteries (2 x 12 V x 100 Ah)	●	
Fuel filler pump (50 l/min)	●	
Single-acting piping kit (breaker, etc.)		●
Double-acting piping kit (clamshell, etc.)	●	
Rotating Piping Kit		●
Quick coupler piping		●
Quick coupler		●
Boom floating control		●
One Pedal Straight Travel System		●
Accumulator for lowering work equipment	●	
Pattern change valve (2 patterns)		●
Fine Swing Control System		●
Tool kit		●
UNDERCARRIAGE		
Lower frame under cover (Additional)		●
Lower frame under cover (Normal)	●	
Track shoes		
Triple grouser shoes (600 mm; 24")	●	
Triple grouser shoes (700 mm; 28")		●
Triple grouser shoes (800 mm; 32")		●
Triple grouser shoes (900 mm; 36")		●
Double grouser shoes (600 mm; 24")		●
Double grouser shoes (700 mm; 28")		●
Track rail guard	●	
Full track rail guard high walker		●

STD = Standard

OPT = Optional

SPECIFICATIONS

HX220 NL

	STD	OPT	STD	OPT
ENGINE			SAFETY	
Cummins QSB 6.7 engine	●		Battery master switch	●
HYDRAULIC SYSTEM			Rearview camera	●
Intelligent Power Control (IPC)			AAVM (Advanced Around View Monitoring)	●
3-power mode, 2-work mode, user mode	●		Four front working lights	●
Variable Power Control	●		Travel alarm	●
Pump Flow Control	●		Rear work lamp	●
Attachment Mode Flow Control		●	Beacon lamp	●
Engine Auto Idle	●		Automatic swing brake	●
Engine Auto Shutdown Control		●	Boom holding system	●
Electronic Fan Control	●		Arm holding system	●
CABIN & INTERIOR			Safety lock valve for boom cylinder with overload warning device	●
ISO Standard cabin			Safety lock valve for arm cylinder	●
Rise-up type windshield wiper	●		Swing Lock System	●
Radio / USB player	●		Three outside rearview mirrors	●
Handsfree mobile phone system with USB	●		OTHER	
12 volt power outlet (24V DC to 12V DC converter)	●		Booms	
Electric horn	●		5.65 m; 18' 6" Mono boom	●
All-weather steel cab with 360° visibility	●		5.65 m; 18' 6" 2-Piece boom	●
Safety glass windows	●		Arms	
Sliding fold-in front window	●		2.0 m; 6' 7"	●
Sliding side window (LH)	●		2.4 m; 7' 10"	●
Lockable door	●		2.92 m; 9' 7"	●
Hot & cool box	●		Removable clean-out dust net for cooler	●
Storage compartment & Ashtray	●		Removable reservoir tank	●
Transparent cabin roof-cover	●		Fuel pre-filter	●
Sun visor	●		Fuel single warmer	●
Door and cab locks, one key	●		Fuel dual warmer	●
Mechanical suspension seat with heater	●		Self-diagnostics system	●
Pilot-operated slideable joystick	●		Hi MATE (Remote Management System)	●
Console box height adjust system	●		Batteries (2 x 12 V x 100 Ah)	●
Automatic climate control			Fuel filler pump (50 l/min)	●
Air conditioner & heater	●		Single-acting piping kit (breaker, etc.)	●
Defroster	●		Double-acting piping kit (clamshell, etc.)	●
Starting Aid (air grid heater) for cold weather	●		Rotating Piping Kit	●
Centralized monitoring			Quick coupler piping	●
8" LCD display	●		Quick coupler	●
Engine speed or Trip meter/Accel.	●		One Pedal Straight Travel System	●
Engine coolant temperature gauge	●		Accumulator for lowering work equipment	●
Max power	●		Pattern change valve (2 patterns)	●
Low speed/High speed	●		Fine Swing Control System	●
Auto idle	●		Tool kit	●
Overload	●		UNDERCARRIAGE	
Check Engine	●		Lower frame under cover (Additional)	●
Air cleaner clogging	●		Lower frame under cover (Normal)	●
Indicators	●		Track shoes	
ECO Gauges	●		Triple grouser shoes (600 mm; 24")	●
Fuel level gauge	●		Triple grouser shoes (700 mm; 28")	●
Hyd. oil temperature gauge	●		Triple grouser shoes (800 mm; 32")	●
Fuel warmer	●		Triple grouser shoes - H / Chassis (600 mm; 24")	●
Warnings	●		Track rail guard	●
Communication error	●		Full track rail guard	●
Low battery	●			
Clock	●			
Cabin lights	●			
Cabin front window rain guard	●			
Cabin roof-steel cover	●			
Seat				
Adjustable air suspension seat with heater		●		
Cabin FOPS/FOG (ISO/DIS 10262) Level 2				
FOPS (Falling Object Protective Structure) - ISO 3449 Level 2		●		
FOG (Falling Object Guard)		●		
Cabin ROPS (ISO 12117-2)				
ROPS (Roll Over Protective Structure)	●			

STD = Standard

OPT = Optional

- * Standard and optional equipment may vary. Contact your Hyundai dealer for more information.
The machine may vary according to International standards.
- * The photos may include attachments and optional equipment that are not available in your area.
- * Materials and specifications are subject to change without advance notice.
- * All imperial measurements rounded off to the nearest pound or inch.
- * The air conditioning system on this machine contains the fluorinated greenhouse gas refrigerant HFC-134a (Global Warming Potential = 1430).
The system contains 0.65 kg of refrigerant which has a CO₂ equivalent of 0.9295 metric tonne.



PLEASE CONTACT