THE CRUSHING EVOLUTION



REDUCE>REUSE>RECYCLE

MB: WELL ESTABLISHED, VERSATILE AND DETERMINED

MB CRUSHER DEVELOPS AND CREATES EQUIPMENT FOR THE CRUSHING, DEMOLITION, AND RECYCLING INDUSTRIES.

It has been doing this for over 18 years. Thanks to its characteristic determination and versatility, the company invented the first crusher for excavators with jaw action.

The company's dedication to technological research has contributed to the development of products that can be used with any type of machine.

Transforming any brand construction equipment into authentic mobile crushers, improving their use on site and their general performance.

As a result, MB Crusher has grown so much over the years that now it is recognised worldwide as an industry leader. With its extensive range of products, it is able to provide the technological solutions companies are looking for.



100% MADE IN ITALY

MB Crusher is an Italian-based company but also present all over the world. All production phases are carried out in the company's corporate office, in Fara Vicentino, Italy.

17.000 square meters of surface house a research and development facility. a production site and sales and administration offices. Here every unit is designed, assembled and offered on an international platform by more than 130 staff members.

Brazil, China, France, Germany, Japan, India, United States.

7 Branch offices support the headquarters with Promoting our products and assisting our customers in all 5 continents. With a dealer network of more than 230 locations we are able to distribute MB Crusher products in more than 150 countries.



GUARANTEED PRODUCTS AND CERTIFIED QUALITY

THE PROMISE OF A RELIABLE PRODUCT, IN COMPLIANCE WITH INTERNATIONAL LAWS, IS AN ESSENTIAL REQUIREMENT FOR OUR CUSTOMERS AND FOR US AT MB.

As proof, every step of every single unit from it's production to its completion, is continuously certified to comply with legal standards, and to keep up with a constantly evolving industry and customer base.

CERTIFICATIONS OF THE PRODUCT

UNI EN ISO 9001 Quality management systems

CE Certificate of conformity

TUV Certificate of safety requirements **PCT** International patent protection

PROCESS CERTIFICATIONS

UNI EN ISO 14001:2004 (UNDERWAY) Environmental management system requirements

RINA CERTIFICATION SYSTEM

Organisation with processes and qualified welding staff

MB CRUSHER SOLUTIONS FOR EVERY MACHINE

CRUSHERS, SCREENERS, GRAPPLES, SHAFT SCREENERS, DRUM CUTTERS

MB Crusher provides professionals in the field, with a wide range of machines that can make demolition and construction sites of any size independent and competitive, both in terms of operations and of workload.

All MB equipment is designed to solve any type of situation, even the most challenging:

we provide solutions for every type of job site, location, or machine. From excavators weighing more than 70 tons down to 3.5 tons, from loaders to backhoe loaders, to mini loaders to telescopic forklifts, there is always a suitable MB attachment. Installation is quick and easy, whether it is a larger or a smaller unit in the MB range.



BEFORE AND AFTER: THE EFFECT OF MB EQUIPMENT ON INERT MATERIALS

The MB Crusher machines transform inert materials directly on site and allow you to manage the recovery and recycling of the materials independently.

BUILDING Materials

Asphalt - Concrete - Brick Reinforced concrete - Travertine



STONE

River rock - Chalk - Marble Granite Lava stone - Cobble stones - Rock Silicon stone - Aggregates Travertine - Basalt



ORGANIC MATERIALS

Organic waste - Clay - Charcoal Wood - Ceramic - Landfill - Sand Salt

METALS

Aluminium - Iron - Copper Foundry material



OTHER

Limestone - Plastics - Glass Demolition material - Vine posts Lamp posts



ONE SYSTEM, Many Application Areas



DEMOLITION



ROAD WORK



URBAN CONSTRUCTION SITES



RECYCLING AND COMPOSTING



UTILITY WORK



TUNNELS



FOUNDRIES

EXCAVATIONS

MAINTENANCE OF PARKLAND, FARMLAND AND WOODLAND



QUARRIES



WORKING INSIDE FACILITIES



FINE SIFTING



77

INDUSTRIAL AREAS



MOVING AND SEPARATING MATERIALS







MB CRUSHER FOR EXCAVATORS

THE WORLD'S WIDEST RANGE OF CRUSHER ATTACHMENTS WITH MORE THAN 90% MARKET SHARE



EFFICIENT HYDRAULICS

PRODUCTIVE

- STABLE
- EQUIPPED
- HARDOX®



m)

MODELS

* rear

							Aun	160000
MODEL	MB-C50 S2	BF60.1 S4	BF70.2 S4	BF80.3 S4	BF90.3 S4	BF120.4 S4	BF 135.8	BF 150.10
RECOMMENDED EXCAVATOR	≥ 5 Ton	≥ 8 Ton	≥ 14 Ton	≥ 18,5 Ton	≥ 21 Ton	\geq 30 Ton	\geq 43 Ton	≥ 70 Ton
RECOMMENDED BACKHOE LOADER	* ≥ 5 Ton	-	-	-	-	-	-	-
WEIGHT	0.75 Ton	1.60 Ton	2.30 Ton	3 Ton	3,50 Ton	4.80 Ton	7.50 Ton	10,50 Ton
LOAD CAPACITY	0.15 m ³	0.55 m ³	0,66 m ³	0.70 m ³	0.90 m ³	1.30 m ³	1.60 m ³	2,30 m ³
PRESSURE	> 200 bar	> 220 bar	> 230 bar	> 230 bar				
OIL FLOW	90 I/min.	98 I/min.	140 I/min.	160 I/min.	180 I/min.	210 I/min.	320 I/min.	380 I/min.
MOUTH OPENING WIDTH	540 mm	610 mm	740 mm	850 mm	910 mm	1205 mm	1300 mm	1450 mm
MOUTH OPENING HEIGHT	250 mm	500 mm	510 mm	510 mm	540 mm	540 mm	600 mm	700 mm
PRODUCTION RATE	m³/h	m ³ /h	m³/h	m³/h	m ³ /h	m ³ /h	m ³ /h	m ³ /h
15 mm	4	7	9	10	12	15	-	-
20 mm	4,8	7,7	10	11	13,2	16,4	-	-
30 mm	6,3	9	12	13	15,5	19,2	-	-
40 mm	7,8	10,4	14	15	17,8	22	38,7	-
50 mm	9,3	11,7	16	17	20	24,8	43,2	-
60 mm	10	13	18	19	22,5	27,6	47,6	-
70 mm	-	14,4	20	21	24,8	30,4	52,2	-
80 mm	-	15,8	22	23	27,2	33	56,6	-
90 mm	-	17,1	24	25	29,5	36	61,1	-
100 mm	-	18,5	26	27	31,8	38,8	65,6	-
110 mm	-	19,8	28	29	34,2	41,6	70,1	73,1
120 mm	-	21	30	31	36,5	44,4	74,5	76,6
130 mm	-	23	31	33	38,8	47,2	79,1	82,5
135 mm	-	-	-	34	41	48,6	81,3	84,1
40 mm 50 mm 60 mm 70 mm 80 mm 90 mm 100 mm 110 mm 120 mm 130 mm 135 mm 140 mm	-	-	-	-	42	50	83,5	87,6
145 mm	-	-	-	-	-	53	85,7	91,1
150 mm	-	-	-	-	-	-	88	95
200 mm							-	120





CERTIFIED AND GUARANTEED OUTPUT SIZE OF THE MATERIAL



WIDEST CRUSHER MOUTH OPENING, per weight of the equipment, available on the market



Designed to pick up and process material WITH EASE WHILE **GUARANTEEING QUALITY AND INCREASED PRODUTION RATES**



QUICK AND EASY MAINTENANCE without the need to replace oil



MB jaw crusher buckets are designed with an AAA+ HYDRAULIC COOLING SYSTEM THAT EXTENDS THE LIFE OF THE EXCAVATOR



Equipped with control devices TO REDUCE VIBRATION on the equipment arm

AREAS OF APPLICATIONS





ROAD WORK





URBAN



INDUSTRIAL

AREAS



DEMOLITION

CONSTRUCTION SITES




WORKING **INSIDE FACILITIES**



ENVIRONMENTAL REMEDIATIONS

ACCESSORIES





DUST SUPRESSION KIT





SPARE PARTS KIT



FIXED COUPLING





HOUR METER



IRON SEPARATOR



MB CRUSHER FOR LOADERS, MINI LOADERS, BACKHOE LOADERS





MODELS









	MODEL	MB-L120 S2	MB-L140 S2	MB-L160 S2	MB-L200 S2
``** #* &	RECOMMENDED BACKHOE LOADER Loader/telehandler	\geq 2,8 \leq 7 Ton	\ge 3 \le 8 Ton	\geq 4,5 \leq 10 Ton	\geq 6 \leq 10 Ton
	WEIGHT	0,95 Ton	0,98 Ton	1,45 Ton	1,50 Ton
	LOAD CAPACITY	0,20 m ³	0,25 m ³	0,35 m ³	0,45 m ³
	PRESSURE	> 200 bar	> 200 bar	> 200 bar	> 200 bar
	COUNTER PRESSURE	< 5 bar	< 5 bar	< 5 bar	< 5 bar
	OIL FLOW	95 I/min.	98 I/min.	110 I/min.	120 I/min.
	MOUTH OPENING WIDTH	730 mm	740 mm	1100 mm	1150 mm
	MOUTH OPENING HEIGHT	250 mm	250 mm	250 mm	260 mm
	PRODUCTION RATE	m³/h	m³/h	m³/h	m³/h
F	15 mm	6	8	9	10
Det	20 mm	7	9	10,2	11,3
	30 mm	9	11	12,7	14
	40 mm	11	13	15,1	16,7
CRUSHING OUTPUT ADJUSTMENT	50 mm	13	15	17,6	19,3
σ	60 mm	14	16	20	22





CERTIFIED AND GUARANTEED OUTPUT SIZE OF THE MATERIAL



WIDEST CRUSHER MOUTH OPENING, per weight of the equipment, available on the market



Designed to pick up and process material WITH EASE WHILE **GUARANTEEING QUALITY AND INCREASED PRODUTION RATES**



QUICK AND EASY MAINTENANCE without the need to replace oil



MB jaw crusher buckets are designed with an AAA+ HYDRAULIC COOLING SYSTEM THAT EXTENDS THE LIFE OF THE EXCAVATOR



Equipped with control devices TO REDUCE VIBRATION on the equipment arm





DEMOLITION

ACCESSORIES

WARRANTY EXTENSION

GOLD 24

NTY CERTIFIC

GOLD24



ROAD WORK





RECYCLING







ENVIRONMENTAL REMEDIATIONS

SPARE PARTS KIT





HOUR METER

DUST SUPRESSION KIT







MB SCREENING BUCKETS





	MODEL	MB-LS170 S2	MB-LS220 S2	MB-S10 S4	MB-S14 S4	MB-S18 S4	MB-S23
\mathcal{L}	RECOMMENDED EXCAVATOR	-	-	≥ 3,5 Ton	≥ 9 < 20 Ton	≥ 20 < 35 Ton	≥ 35 Ton
**	RECOMMENDED LOADER	≥ 6,5 < 11 Ton	≥ 12 < 25 Ton	-	-	-	-
X64.	RECOMMENDED BACKHOE	≥ 6,5 < 11 Ton	\geq 12 < 25 Ton	$* \ge 4 < 9$ Ton	-	-	-
	WEIGHT	1,45 Ton	2,80 Ton	0,39 Ton	1,10 Ton	2 Ton	3,75 Ton
	LOAD CAPACITY	1,10 m ³	2,40 m ³	0,32 m ³	1,10 m ³	2,40 m ³	4,30 m ³
	PRESSURE/COUNTER PRESSURE	> 160 bar /< 40 bar	> 200 bar	> 130 bar	>150 bar	> 200 bar	> 320 / < 5 bar
	OIL FLOW	80 l/min.	120 I/min.	40 l/min.	60 l/min.	120 I/min.	160 I/min.

WWW.MBCRUSHER.COM

MODELS

* rear



MB UNIQUE Advantages



Designed with a cone-shaped basket with the size and depth to **OPTIMIZE PRODUCTION RATES**



Equipped with A LOADING STRAIN **CONTROL SYSTEM**



OUR SCREENER BUCKETS HAVE THE WIDEST SCREENING SURF ACE available on the market, per weight of the equipment



Equipped with **BRACKETS**



DESIGNED TO PICK UP AND PROCESS MATERIAL WITH EASE



QUICK AND EASY interchangeable modular panels available in different sizes











QUARRIES



MINES

ENVIRONMENTAL REMEDIATIONS

Þ

INDUSTRIAL AREAS

FIXED COUPLING

FINE SIFTING

RECYCLING

UTILITY WORK CONSTRUCTION SITES



WARRANTY EXTENSION GOLD 24



IRON SEPARATOR



SPARE PARTS KIT



DUST SUPRESSION KIT





HOUR METER



BASKET PROTECTION KIT







FIXED COUPLING



MB SHAFTS SCREENER







SHAFT KITS * shaft in closed position

Shart III clos		CETTING	
	KIT	SETTINGS	APPLICATION
<u> </u>	RC COMPOST KIT	36,5* mm	Crushing drywall, brushwood and wood trusses Crushing foliage and plant wood Composting
1	RM MIXER KIT	-	Crushing drywall, asphalt, light construction debris Composting Breaking down charcoal Soil Aeration
O	RE8/RE16 FINE SIFTING KIT	8,5/16 mm	Screening damp soil, dry soil, light construction debris Crushing foliage and plant wood and charcoal Crushing drywall and brushwood Composting Soil Aeration
•	RQ20/RQ50 MEDIUM SIFTING KIT	20/50 mm	Screening damp soil, dry soil, light construction debris Composting Soil Aeration

MODELS









	MODEL	MB-HDS214	MB-HDS314	MB-HDS320	MB-HDS323
-	RECOMMENDED EXCAVATOR	$\ge 6 \le 12$ Ton	$\geq 10 \leq 20$ Ton	$\ge 16 \le 24$ Ton	≥18 ≤ 35 Ton
	RECOMMENDED BACKHOE LOADER/LOADER	$\ge 5 \le 8$ Ton	$\ge 6 \le 10$ Ton	$\ge 9 \le 12$ Ton	\geq 10 \leq 15 Ton
6 **	RECOMMENDED SKID LOADER	≥ 3,5 Ton	-	-	-
	WEIGHT	0,82 Ton	1,4 Ton	2,1 Ton	2,4 Ton
	LOAD CAPACITY	0,5 m³	0,9 m³	1,35 m ³	1,65 m³
	PRESSURE	> 200 bar	> 225 bar	> 250 bar	> 250 bar
	COUNTER PRESSURE	-	< 5 bar	< 5 bar	< 5 bar
	OIL FLOW	75 I/min.	100 l/min.	130 I/min.	130 I/min.

WWW.MBCRUSHER.COM



MB UNIQUE Advantages



OPTIMAL DESIGN AND LARGE LOADING CAPACITY ensure optimum levels of output



MODERATE NOISE EMISSION



QUICK, EASY AND CENTRALIZED MAINTENANCE



AUTOMATIC HYDRAULIC SYSTEM for engine and transmission protection



SYSTEM for interchangeable shaft kits, carried out by the machine operator directly on site and in complete safety



Includes SHAFT HOLDER

AREAS OF APPLICATIONS



RECYCLING





UTILITY WORK



COMPOSTING





FINE SIFTING



CRUSHING ASPHALT

REMEDIATIONS

ACCESSORIES



RC COMPOST KIT





FIXED COUPLING







SHAFT HOLDER

RQ20/RQ50 MEDIUM SIFTING KIT





MB DRUM CUTTERS

COMPACT AND STABLE
THE ONLY ONE WITH DIRECT DRIVE TWIN MOTOR SYSTEM
PRECISE AND VERSATILE
SAFE AND EFFICIENT
HIGH-PERFORMING HYDRAULICS



REPLACEABLE DRUMS EASILY ON THE JOB IN LESS THAN 1 HOUR



MODELS









MODEL	MB-R500	MB-R700	MB-R800	MB-R900
CRECOMMENDED EXCAVATOR	≥ 3,5 < 11 Ton	≥ 6 < 13 Ton	≥ 10 < 22 Ton	≥ 19 < 35 Ton
RECOMMENDED SKID LOADER	≥ 3,5 Ton	-	-	-
PICK FORCE	19600 N	19600 N	33900 N	40000 N
SPEED/min. (MIN/MAX)	80/120	80/110	60/80	60/80
OUTPUT TORQUE	5000 Nm	5000 Nm	10000 Nm	13200 Nm
PRESSURE/COUNTER PRESSURE	> 200 / < 4 bar	> 250 / < 4 bar	> 350 / < 4 bar	> 350 / < 4 bar
WEIGHT	0,3 Ton	0,6 Ton	1 Ton	1,4 Ton
OIL FLOW	60 - 120 I/min.	110-180 l/min.	200-300 l/min.	250-350 l/min.
DIAMETER DRUM	500 mm	500 mm	600 mm	680 mm

WWW.MBCRUSHER.COM



MB UNIQUE Advantages





Excavator HIGH OIL TEMPERATURE **REDUCING DEVICE** available



Equipped with **NO TORSION SYSTEM** which reduces transversal stress on the arm of the excavator



Equipped with **POWER BOOST**.

Multiplying the power on the rotary cutter when it requires more power

Equipped with WEAR-RESISTANT **PLATES** for the protection of the central body



Suitable for UNDERWATER WORK







ACCESSORIES

WARRANTY EXTENSION

GOLD 24

ANTY CERTINICS

GOLD24

ACCESSORIES

MB-R500



FIXED COUPLING

DRUM COVER KIT











TRENCH EXCAVATION, UTILITY WORK ROCK, ASPHALT AND CEMENT

ROAD CONSTRUCTION MAINTENANCE AND SITES SURFACE PROFILING

DRUM KIT

CUTTING DEPTH

ADJUSTMENT KIT

TUNNEL AND ROCK MILLING

QUARRIES

ROCK AND ASPHALT PICK KITS

*CUTTER BODY

ROTATION KIT







ANSM





DEMOLITION

MB DEMOLITION AND SORTING GRAPPLES



MODELS









MODEL	MB-G600 S2	MB-G900 S2	MB-G1200 S2	MB-G1500 S2
RECOMMENDED EXCAVATOR	\geq 6 \leq 12 Ton	\geq 12 \leq 18 Ton	\ge 18 \le 30 Ton	$\ge 20 \le 30$ Ton
WEIGHT	0,60 Ton	0,78 Ton	1,60 Ton	2 Ton
LOAD CAPACITY (CLAWS CLOSED)	0,29 m³ / 290 L	0,43 m³ / 430 L	0,71 m³ / 710 L	1,43 m³ / 1430 L
ROTATION	360°	360°	360°	360°
FLOW DIRECTION	15 ÷ 30 I/min.	15 ÷ 30 l/min.	20 ÷ 35 l/min.	20 ÷ 35 l/min.
PRESSURE OF ROTATION	> 160 bar	> 160 bar	> 220 bar	> 220 bar
PRESSURE (OPEN/CLOSE)	200 ÷ 400 bar	200 ÷ 400 bar	300 ÷ 400 bar	300 ÷ 400 bar
OIL FLOW (OPEN/CLOSE)	25 I/min.	30 I/min.	70 I/min.	70 I/min.



MB UNIQUE ADVANTAGES



INCLINED COUPLING SYSTEM



Equipped with a **POWER EXTENDER KIT**



Equipped with a SOUNDPROOFING SYSTEM

BLADES CAN BE EASILY REPLACED ON THE JOB SITE



Equipped with **OPTIONAL** ACCESSORIES FOR DIFFERENT NEEDS OF THE JOB

AREAS OF APPLICATIONS





ACCESSORIES

WARRANTY EXTENSION

GOLD 24

ARANTY CERTINIC SA GOLD24

CLAM SHELL KIT

ICATE TY CERTIF



URBAN

CONSTRUCTION SITES



FREIGHT YARDS

PORTS AND



RECYCLING CENTER



MOVING AND SEPARATING MATERIALS

***ROTATION POWER** EXTENDER KIT

MULTI-PURPOSE BLADE KIT





GRIP IMPROVEMENT KIT

SPARE PARTS KIT







FIXED COUPLING

TILTING LIFT RUBBER PROTECTION KIT



*ROTATION FLOW RATE 40 - 70 I/min




OVER 60 YEARS OF SPECIALISATION

PROVEN, GUARANTEED QUALITY

EXCLUSIVE PRODUCTS AND PATENTS

OPERATING ALL OVER THE WORLD

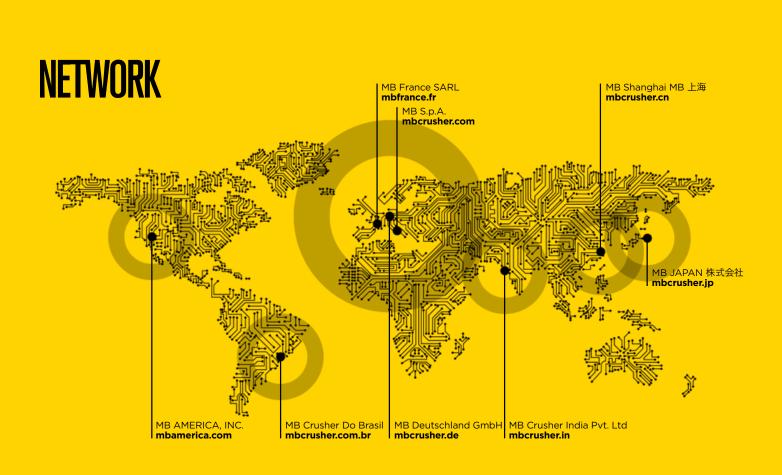

MB HEADQUARTERS

Via Astico 30/A, 36030 Fara Vicentino (VI) Italy Tel +39 0445 308148 - Fax +39 0445 308179 info@mbcrusher.com





The data provided above is not binding, as the manufacturer reserves the right to make improvements to its products at any time and without notice.