


Multi Processor



FEATURES

- Hydraulic rotating motor provides improved mobility.
- Crushing concrete and cutting steel as switching arms.
- Improved design guarantees durability.
- Speed-up valve applied as standard.

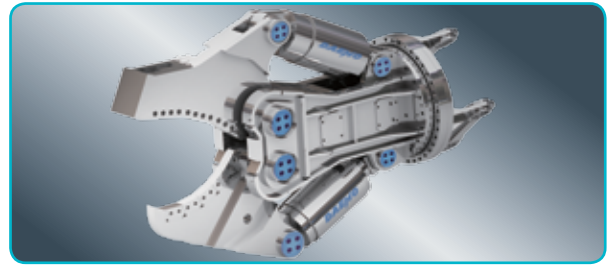

SPECIFICATIONS


Description	Unit	DMP130CFS	DMP230CMS	DMP230SM	DMP330CMS	DMP330CML	DMP330SM
Operating Weight	kg	1,200	1,730	1,810	2,850	2,910	3,000
	lb	2,646	3,814	3,990	6,283	6,415	6,614
Max. Opening Width	mm	700	900	486	1,110	1,220	613
	inch	27.6	35.4	19.1	43.7	48	24.1
Overall Length	mm	1,773	2,044	2,247	2,474	2,546	2,508
	inch	69.8	80.5	88.5	97.4	100.2	98.7
Average Crushing Force	ton	60	82	118	136	121	197
Max. Cutting Force	ton	251	577	343	584	584	559
Operating Pressure	kg/cm ²	280	320	320	320	320	320
	psi	3,983	4,552	4,552	4,552	4,552	4,552
Oil Flow Rate	LPM	170~220	200~250	200~250	250~300	250~300	250~300
	GPM	44.9~58.2	52.8~66.1	52.8~66.1	66.1~79.3	66.1~79.3	66.1~79.3
Excavator Class	ton	13~20	18~26	18~26	27~36	27~36	27~36

Multi Processor (Quick Change)



FEATURES

- Replaceable arms and tooth (Crusher, Shear, Demolition and Pulverizer).
- Best material 'Hardox Hituf' and 'Hardox 400'.
- Required Arm can be replaced within 10 minutes (Quick Change).
- Speed-up valve increases work efficiency (Standard).

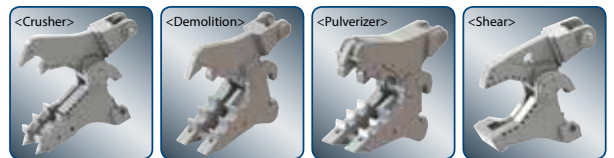

SPECIFICATIONS

Description	Unit	DMP200Q				DMP250Q			
		Crusher	Demolition	Pulverizer	Shear	Crusher	Demolition	Pulverizer	Shear
Operating Weight	kg	2,183	2,190	2,200	2,037	2,900	2,820	2,826	2,698
Crushing Force (Tip)	ton	59	60	60	85	85	85	85	120
Crushing Force (Mid)	ton	82	98	92	140	120	140	130	190
Opening Width	mm	791	727	843	393	875	940	945	480
Width Upper Jaw	mm	127	127	310	99	80	80	316	120
Width Lower Jaw	mm	360	360	380	250+200	426	500	490	352
Cutter Length	mm	180×2	200	200	200	200+200	200	200	300+250
Operating Pressure	kg/cm ²	320				320			
Oil Flow Rate	LPM	120~200				200~250			
Cycle Time (Open/Close)	sec	2.0 / 2.1				2.0 / 2.3			
Rotation Pressure	kg/cm ²	160				160			
Rotation Flow	LPM	36~40				36~40			
Excavator Class	ton	18~25				25~35			